
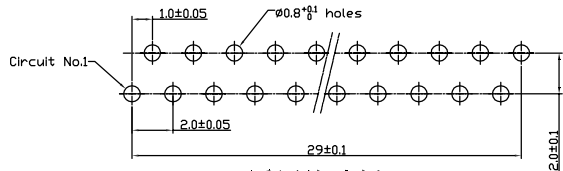


SECTION A-A

NOTES

RATING  
 OPERATING TEMPERATURE: -25~85°C  
 OPERATING VOLTAGE: 50V AC/DC  
 CURRENT RATING: 0.5 AMPS  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 500V AC/Minute;  
 INSULATION RESISTANCE: 500MΩ Min;  
 CONTACT RESISTANCE: 0.03Ω Max;

MATERIAL;  
 Contact Material: Phosphor Bronze  
 Insulator Material: LCP UL94V-0

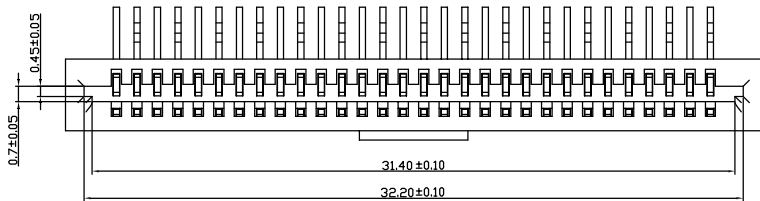

适用线路板  
 RECOMMENDED PCB LAYOUT

Ordering Information

XB-FPC-10-105 - XX XX A 004 C X A X -06

No. of Pins per Row: 30  
 Selective Plating: 01=Tin, 02=Gold Flash  
 Color: 1=Black, 2=White  
 Standard Packing: C=Tube, Selective Packing: B=Tray

**XB** 东莞市溪榜电子有限公司  
 DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD. ANG PROJ.  
  
 PAGE: 1/1

GENERAL TOLERANCE	
X.'±5.0°	X.±0.35
.X'±3.0°	.X±0.30
.XX'±2.0°	.XX±0.25
.XXX'±1.0°	.XXX±0.10

DESIGNED:  
 CHECKED:  
 APPROVED:

DATE:  
 DATE:  
 DATE:

DWG. NO.  
 XB-FPC-10-105  
 PART NO.

TITLE:  
 1.0 PFC COON. NON ZIP DIP FRONT/FLIP H=3.5 CONTACT

REV. A UNIT. mm SCALE. 1:1