

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F



E

D



C

B


A

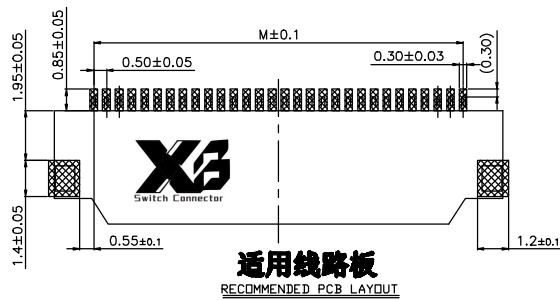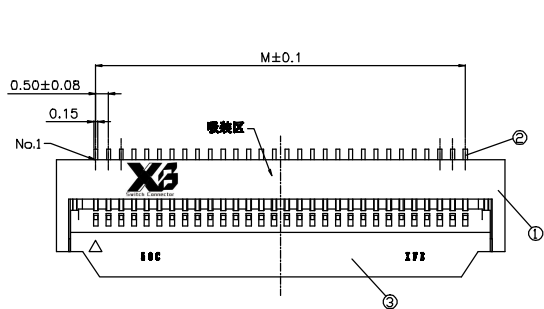


- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: -25° C~85° C;
 - 3、额定电压: 50V, AC, DC(等效);
 - 4、接触电阻: ≤0.03Ω;
 - 5、绝缘电阻: ≥500MΩ;
 - 6、耐压: 500V, AC/minute.
 7. 所有材料必须满足GREENCONN有害物质管控标准。

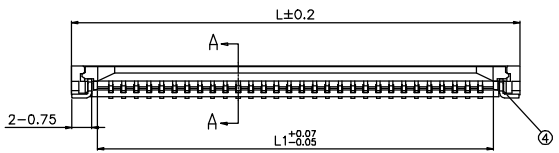

| PIN | M | L1 | L |
|-----|------|-------|-------|
| 04 | 1.5 | 2.56 | 4.60 |
| 06 | 2.5 | 3.56 | 5.60 |
| 08 | 3.5 | 4.56 | 6.60 |
| 16 | 7.5 | 8.56 | 10.60 |
| 24 | 11.5 | 12.56 | 14.60 |
| 28 | 13.5 | 14.56 | 16.60 |
| 30 | 14.5 | 15.56 | 17.60 |
| 33 | 16.0 | 17.06 | 19.10 |
| 40 | 19.5 | 20.56 | 22.60 |
| 50 | 24.5 | 25.56 | 27.60 |
| 54 | 26.5 | 27.56 | 29.60 |

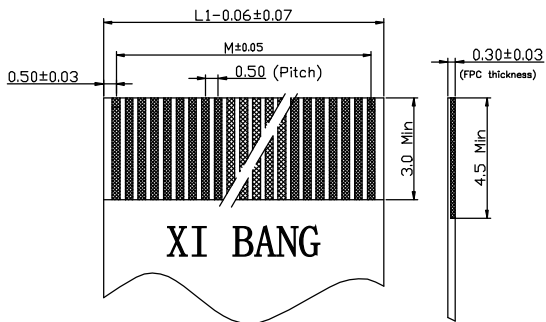


适用FPC尺寸
APPLICABLE FPC

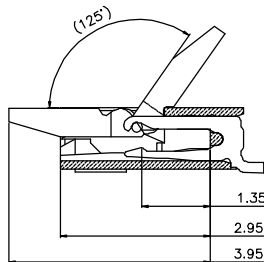

SECTION A-A(2:1)

Ordering Information

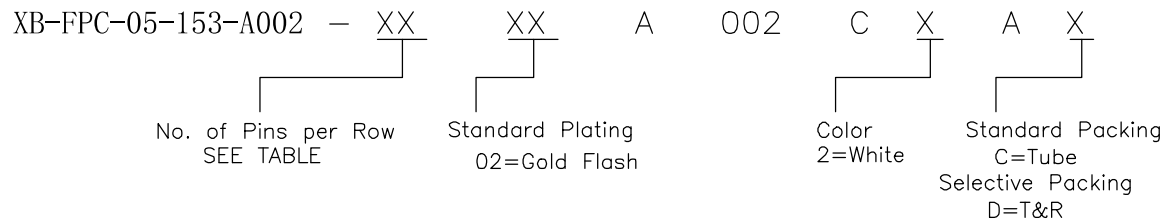

| | | | | |
|----|-----------------|---------------------|-----|--------------------------------|
| 4 | 焊片 Fitting Nail | 磷青铜 Phosphor Bronze | 2 | 整个表面镀底镍30u"MIN, 再镀锡 80u" .MIN. |
| 3 | 锁扣 Actuator | LCP(UL94V-0) | 1 | 黑色/棕色 |
| 2 | 端子 Contact | 磷青铜 Phosphor Bronze | n*1 | 整个表面镀底镍30u"MIN, 再镀金 2u" .MIN. |
| 1 | 底座 Housing | LCP(UL94V-0) | 1 | 本色 |
| 序号 | 名称 | 材料 | 数量 | 备注 |

| | | | | | | |
|--|-------------------|------------|-----------|-------|--------------------|--------------------------------|
| 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD | GENERAL TOLERANCE | | DESIGN: | DATE: | DWG. NO. | TITLE: PH0.5 FPC 下接 90度 SMT |
| | X: ±3.0' | X: ±/ | CHECKED: | DATE: | XB-FPC-05-153-A002 | |
| | .X' ±1.0' | >30±0.25 | APPROVED: | DATE: | PART NO. | |
| REV. 01 | UNIT. mm | SCALE. 1:1 | PAGE. 1/1 | | | |

1 2 3 4 5 6 7 8 9