

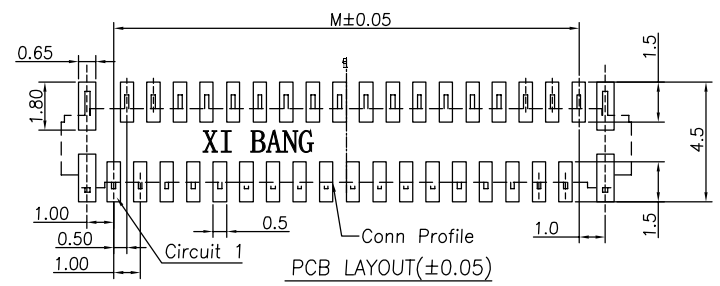

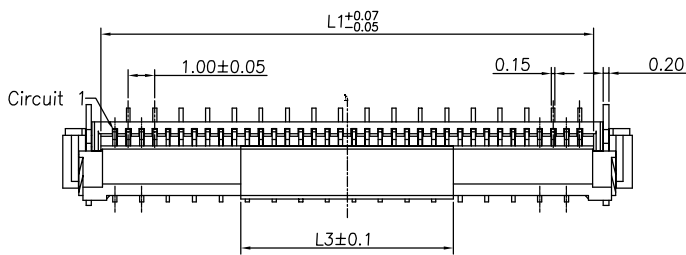
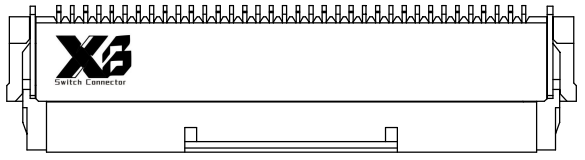


F



E



D

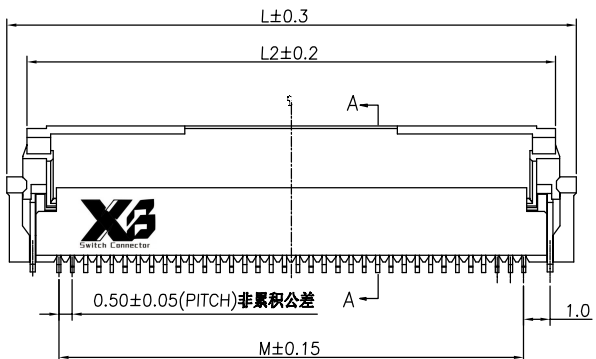

Specifications
 Operating Temperature: -40°C ~ +85°C
 Operating Voltage: 50V AC/DC
 Current Rating: 0.5Amp
 Dielectric Withstanding Voltage: 200V AC/Minute
 Insulation Resistance: 500MΩ Min.
 Contact Resistance: 0.03Ω Max.
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 PA9T or the equivalent material
 All materials must meet XI BANG hazardous substances control standards.

C

B



Ordering Information

XB-FPC-05-149 - XX XX A 001 D X A X

No. of Pins per Row SEE TABLE

Standard Plating
 09=Gold 3u"
 Selective Plating
 02=Gold Flash

Color
 2=White

Standard Packing
 D=Tape&Reel

PINS	M	L1	L	L2	L3
08	3.5	4.56	7.5	5.9	4
09	4	5.06	8.0	6.4	4
10	4.5	5.56	8.5	6.9	4
12	5.5	6.56	9.5	7.9	4
14	6.5	7.56	10.5	8.9	4
16	7.5	8.56	11.5	9.9	4
24	11.5	12.56	15.5	13.9	8
30	14.5	15.56	18.5	16.9	8
32	15.5	16.56	19.5	17.9	8
36	17.5	18.56	21.5	19.9	8
40	19.5	20.56	23.5	21.9	8
50	24.5	25.56	28.5	26.9	8
60	29.5	30.56	33.5	31.9	8

A

X3 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X.*±3.0"	X.±
.X*±0.5"	.X±0.25
.XX*±	.XX±0.15
.XXX*±	.XXX±0.05

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 XB-FPC-05-149
 PART NO.

TITLE:
 0.5Pitch FPC ZIF SMT
 FRONTFLIP H=4.85 VERTICAL
 CONTACT

REV.	UNIT.	SCALE.	PAGE.
A1	mm	1:1	1/1