

適用線路板  
RECOMMENDED PCB LAYOUT

# Ordering Information

XB-FPC-05-146 - XX

XX

A

006

C

X

A

X

No. of Pins per Row  
See Table


Standard Plating  
01=Tin

Color  
2=White

Standard Packing  
D=Tape Reel

Table:

No. of PIN/ROW	Dimension Information			No. of PIN/ROW		
	M	L1	L	M	L1	L
04	1.50	2.56	8.00			
05	2.00	3.06	8.50	34	16.50	23.00
06	2.50	3.56	9.00			
08	3.50	4.56	10.00			
10	4.50	5.56	11.00			
				40	19.50	26.00
12	5.50	6.56	12.00			
13	6.00	7.06	12.50			
14	6.50	7.56	13.00			
15	7.00	8.06	13.50			
16	7.50	8.56	14.00			
18	8.50	9.56	15.00			
20	9.50	10.56	16.00			
				50	24.50	31.00
22	10.50	11.56	17.00			
24	11.50	12.56	18.00			
25	12.00	13.06	18.50	54	26.50	33.00
26	12.50	13.56	19.00			
28	13.50	14.56	20.00			
30	14.50	15.56	21.00			
32	15.50	16.56	22.00			

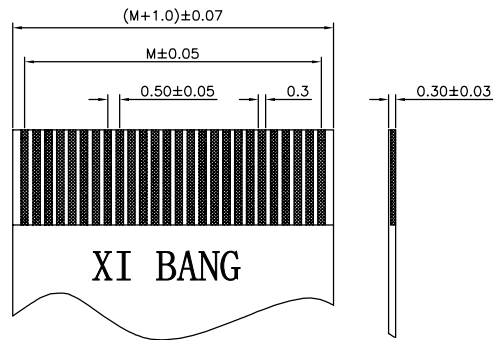

適用FPC寸法  
APPLICABLE FPC

## Specifications

Insulation Resistance: 500MΩ Min.  
Dielectric Withstanding: 500V, AC/minute  
Contact Resistance: 0.03Ω Max.  
Rating voltage: 50V, AC, DC  
Operating Temperature: -25°C to +85°C

## Materials

Contact Material: Phosphor Bronze  
Fitting Nail: Phosphor Bronze  
Housing: High Temperature Thermoplastic  
UL 94V-0 LCP

Actuator: PPS(UL94V-0)

All materials must meet XI BANG hazardous substances control standards.

**XI BANG** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. A1 UNIT. mm SCALE. 1:1 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGN:  
CHECKED:  
AUDITED:

DATE:  
DATE:  
DATE:

DWG. NO.  
XB-FPC-05-146  
PART NO.

TITLE:  
0.5 臥貼 FPC 下接