
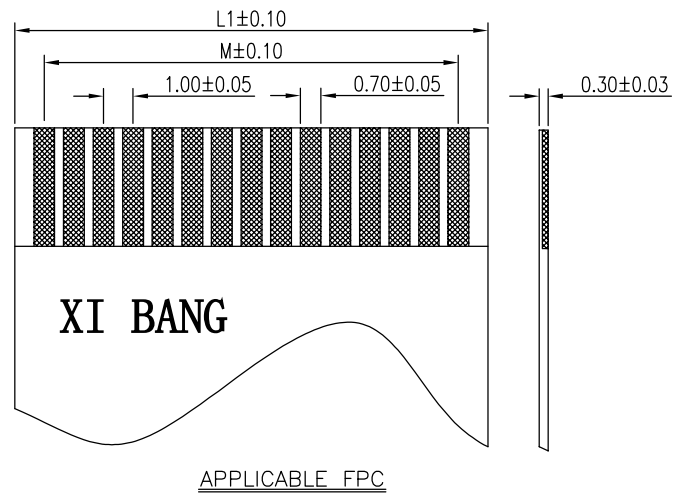
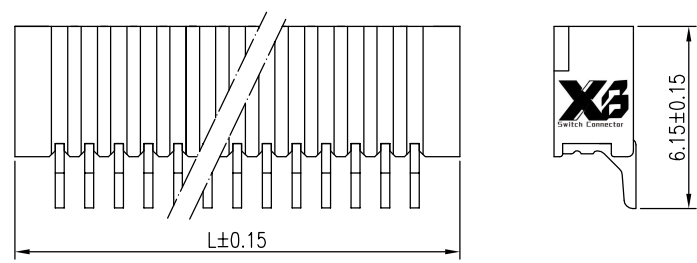
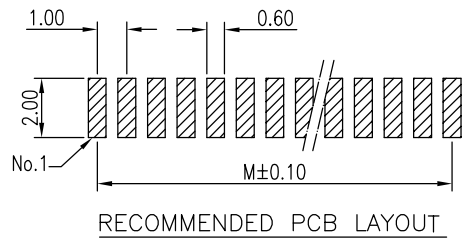



Specifications
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 0.05Ω Max.
 Operating Temperature: -25°C to +85°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Thermoplastic
 UL 94V-0 Nylon46 or the equivalent materia
 All materials must meet XI BANG
 requirement for environment protection

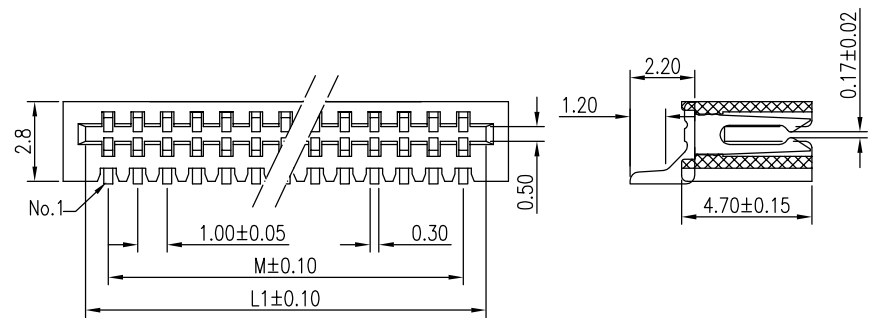

| No. of PIN/ROW | Dimension Information | | |
|----------------|-----------------------|-------|-------|
| | M | L1 | L |
| 04 | 3.00 | 5.10 | 6.00 |
| 05 | 4.00 | 6.10 | 7.00 |
| 06 | 5.00 | 7.10 | 8.00 |
| 07 | 6.00 | 8.10 | 9.00 |
| 08 | 7.00 | 9.10 | 10.00 |
| 09 | 8.00 | 10.10 | 11.00 |
| 10 | 9.00 | 11.10 | 12.00 |
| 11 | 10.00 | 12.10 | 13.00 |
| 12 | 11.00 | 13.10 | 14.00 |
| 13 | 12.00 | 14.10 | 15.00 |
| 14 | 13.00 | 15.10 | 16.00 |
| 15 | 14.00 | 16.10 | 17.00 |
| 16 | 15.00 | 17.10 | 18.00 |
| 17 | 16.00 | 18.10 | 19.00 |
| 18 | 17.00 | 19.10 | 20.00 |
| 19 | 18.00 | 20.10 | 21.00 |
| 20 | 19.00 | 21.10 | 22.00 |
| 21 | 20.00 | 22.10 | 23.00 |
| 22 | 21.00 | 23.10 | 24.00 |
| 23 | 22.00 | 24.10 | 25.00 |
| 24 | 23.00 | 25.10 | 26.00 |
| 25 | 24.00 | 26.10 | 27.00 |
| 26 | 25.00 | 27.10 | 28.00 |
| 27 | 26.00 | 28.10 | 29.00 |
| 28 | 27.00 | 29.10 | 30.00 |
| 29 | 28.00 | 30.10 | 31.00 |
| 30 | 29.00 | 31.10 | 32.00 |
| 31 | 30.00 | 32.10 | 33.00 |
| 32 | 31.00 | 33.10 | 34.00 |
| 33 | 32.00 | 34.10 | 35.00 |
| 34 | 33.00 | 35.10 | 36.00 |
| 35 | 34.00 | 36.10 | 37.00 |
| 36 | 35.00 | 37.10 | 38.00 |
| 37 | 36.00 | 38.10 | 39.00 |
| 38 | 37.00 | 39.10 | 40.00 |
| 39 | 38.00 | 40.10 | 41.00 |
| 40 | 39.00 | 41.10 | 42.00 |

Ordering Information

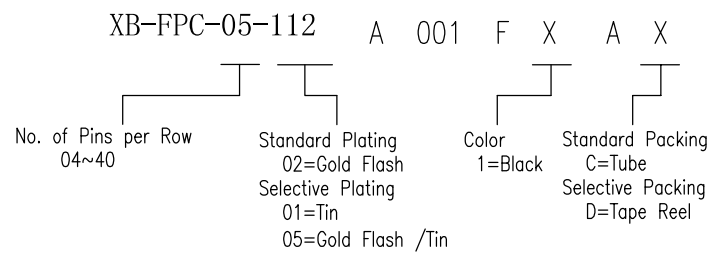

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

| GENERAL TOLERANCE | |
|-------------------|-------------|
| X.* ± 5.0° | .X ± 0.30 |
| .X* ± 3.0° | .X ± 0.25 |
| .XX* ± 2.0° | .XX ± 0.15 |
| .XXX* ± 1.0° | .XXX ± 0.10 |

| | |
|----------|-------|
| DESIGN: | DATE: |
| CHECKED: | DATE: |
| AUDITED: | DATE: |

| | |
|----------|---------------|
| DWG. NO. | XB-FPC-05-112 |
| PART NO. | |
| | -X |

| | |
|--------|------------------------------|
| TITLE: | PITCH 1.00mm FPC SMT TYPE |
|--------|------------------------------|

| | | | | |
|------|-------|--------|-------|--|
| REV. | UNIT. | SCALE. | PAGE. | |
| 04 | mm | 1:1 | 1/1 | |