




1 2 3 4 5 6 7 8 9



F



E

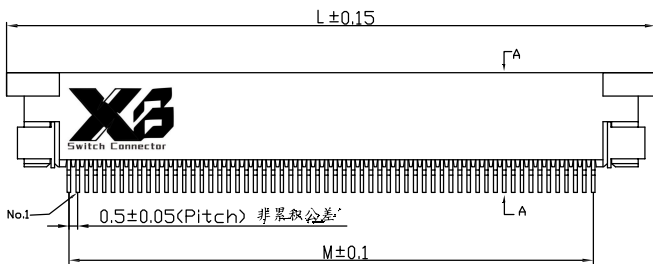


D



NOTE:

- Material:
    - Housing: Heat Resistance Plastic (UL94V-0) Nylon 46 natural color or (UL94V-0) LCP
    - Actuator: Heat Resistance Plastic (UL94V-0) PPS brown
    - Terminal: Phosphor bronze
    - Clip: Phosphor bronze
  - Specifications
    - Current Rating : 0.5A AC/DC(max.)
    - Insulation Resistance: 500M Ω Min.
    - Dielectric Withstanding: 500V AC/DC
    - Contact Resistance: 0.03 Ω Max.
    - Operating Temperature: -25°C to +85°C
- All materials must meet XI BANG hazardous substances control standards.

C

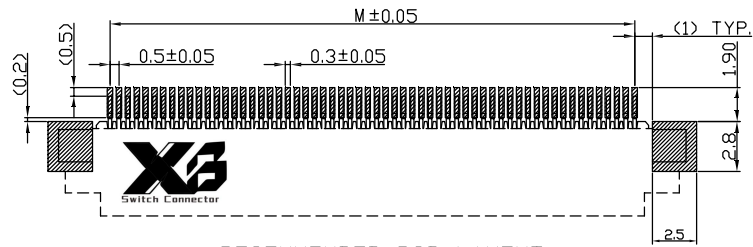


Ordering Information

102 - XX XX A 037 X X A X

No. of Pins per Row: 40,45,50,60  
 Standard Plating: 02=Gold Flash  
 Selective Plating: 01=Tin, 05=Gold Flash/Tin  
 ...

Housing: C=LCP, F=Nylon 46  
 Color: 2=White

Standard Packing: C=Tube, D=Tape Reel  
 Selective Packing: ...

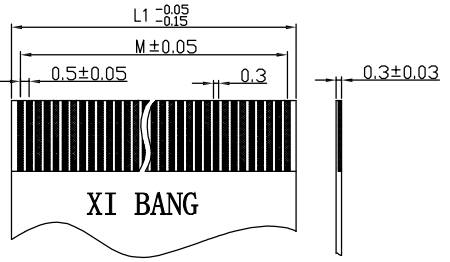

No. of PIN/ROW	Dimension Information		
	M	L1	L
40	19.50	20.60	26.50
45	22.00	23.10	29.00
50	24.50	25.60	31.50
60	29.50	30.60	36.50

A

**XB** 东莞市溪榜电子有限公司  
 DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:  
 CHECKED:  
 AUDITED:

DATE:  
 DATE:  
 DATE:

DWG. NO.  
 XB-FPC-05-102-A037  
 PART NO.

TITLE:  
 PITCH 0.5 mm FPC  
 臥貼下接

REV. A UNIT. mm SCALE. 4:1 PAGE. 1/1

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A