






Specifications :
 Voltage rating: 250V AC / DC
 Current rating: 5A AC / DC
 Withstanding voltage: 1500V AC/minute
 Temperature range: -40°C~+105°C
 Insulation resistance:1000MΩ(min)
 Contact resistance: ≤10mΩ
 After environmental testing: ≤20mΩ



Category:wafer
 Welding Board Angle:90°
 Welding Way: DIP
 Material: PBT 94V-0
 Material(Pin):Brass
 Planting Category:
 Bright tin plating 70u" Min.
 Color: Natural Color Black

Poles	Dimensions(mm)	
	M	L
01	—	6.65
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

All materials must meet XI BANG requirement for environment protection.

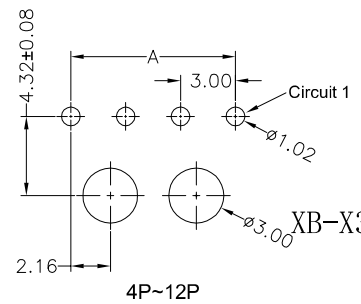

Recommended P.C.B Layout
 General Tolerance±0.05

Ordering Information

XB-X30-PCB-W-108-XX XX B 001 A X B X
 No. of Pins per Row 01~12 Standard Plating 01=Tin Color 1=Black Standard Packing N=PE Bag A=BOX

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X.*±/	X.±/
.X*±/	.X±0.30
.XX*±/	.XX±0.20
.XXX*±/	.XXX±0.10

DESIGN:
 CHECKED:
 AUDITED:

DATE:
 DATE:
 DATE:

DWG. NO.
XB-X30-PCB-W-108
 PART NO.

TITLE:
 3.0 mm Crimp Style Connectors

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1