

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F


E

D


C

B

A

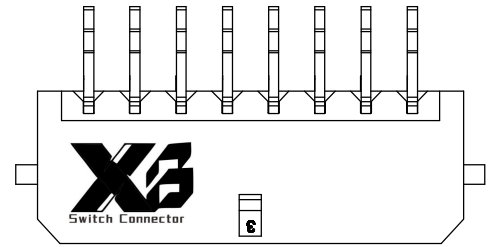



Poles	Dimensions(mm)	
	M	L
2*01		6.65
2*02	3.00	9.65
2*03	6.00	12.65
2*04	9.00	15.65
2*05	12.00	18.65
2*06	15.00	21.65
2*07	18.00	24.65
2*08	21.00	27.65
2*09	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65

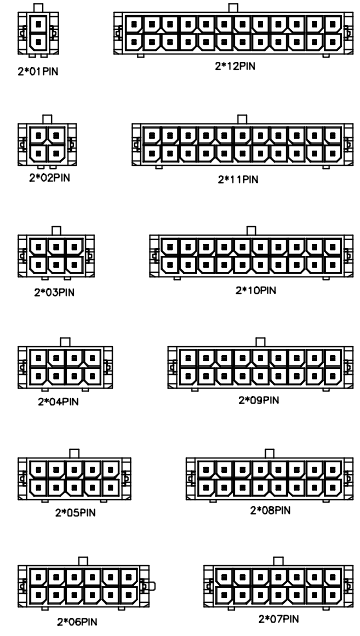

Specifications :

Voltage rating: 250V AC / DC
 Current rating: 5A AC / DC
 Withstanding voltage: 1000V AC/minute
 Temperature range: -25°C~+85°C
 Insulation resistance: ≥1000MΩ
 Contact resistance: ≤10mΩ
 After environmental testing: ≤20mΩ

Series No.
 Category:wafer
 Welding Board Angle:90°
 Welding Way: SMT
 Material: LCP 94V-0
 Material(Pin):Brass
 Planting Category:
 Tin-Plated/Matte Tin Plating
 Color: Natural Color
 All materials must meet XI BANG requirement for environment protection.

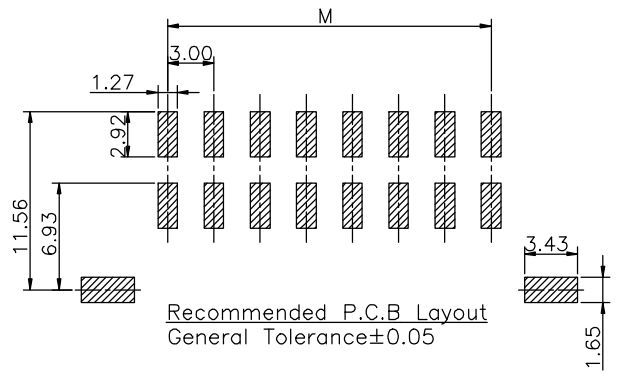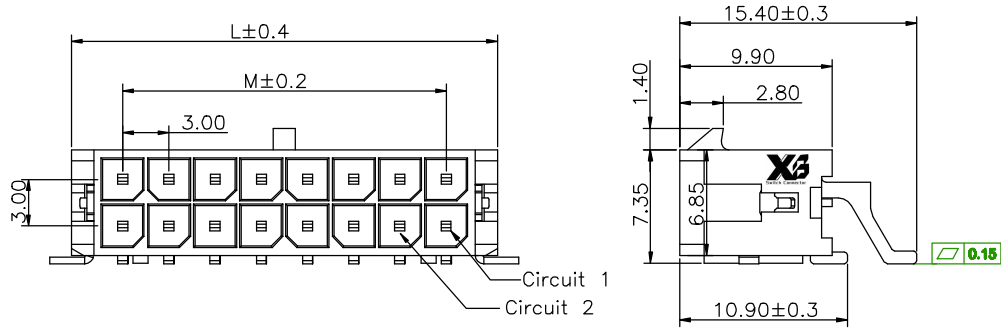

Ordering Information

XB-X30-PCB-M-203 - XX XX A 002 C X B X

No. of Pins per Row 01~12 Standard Plating 22=Matte Tin Color 1=Black Standard Packing D=Tape&Reel

X3 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 01 UNIT. mm SCALE. 1:1 PAGE. 1/1

GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO.	TITLE. 3.00mm Crimp Style Connectors
X.±/	X.±/	CHECKED:	DATE:	XB-X30-PCB-M-203	
.X'±/	.X±0.30	AUDITED:	DATE:	PART NO. -	

1 2 3 4 5 6 7 8 9