
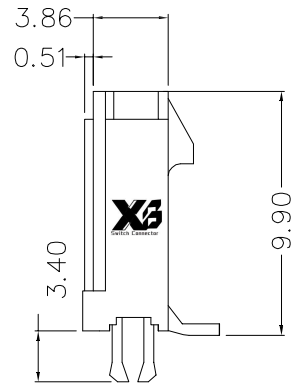


P.C.B. LAYOUT

### Specifications

Voltage rating: 250V AC / DC  
 Current rating: 5A AC / DC  
 Withstanding voltage: 1000V AC/minute  
 Temperature range: -25°C~+85°C  
 Insulation resistance: ≥1000MΩ  
 Contact resistance: ≤10mΩ  
 After environmental testing: ≤20mΩ

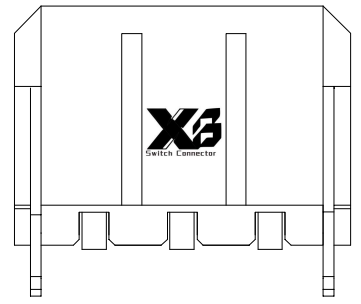

No of Pins	Dimensions (mm)	
	L	M
02	9.65	3.00
03	12.65	6.00
04	15.65	9.00
05	18.65	12.00
06	21.65	15.00
07	24.65	18.00
08	27.65	21.00
09	30.65	24.00
10	33.65	27.00
11	36.65	30.00
12	39.65	33.00

### Ordering Information

XB-X30-PCB-114-XX-A-XX F 001 C X B X

No. of Pins per Row: 02~12  
 Standard Plating: 22=Matte Tin, Selective Plating: 01=Tin, 02=Gold Flash  
 Color: 1=Black, 2=White, ...  
 Standard Packing: D=Tape&Reel

<b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD	<b>3RD.ANG PROJ.</b> 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. <b>XB-X30-PCB-114</b>	TITLE. 3.0mm pitch Crimp Style Connector				
		X'±3.0°	X.±/					CHECKED:	DATE:		
		.X'±2.0°	.X±0.30							APPROVED:	DATE:
		.XX'±1.5°	.XX±0.25								
.XXX'±1.0°	.XXX±0.15										
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1								