



Specifications :

Voltage rating: 250V AC / DC
 Current rating: 5A AC / DC
 Withstanding voltage: 1000V AC/minute
 Temperature range: -25°C~+85°C
 Insulation resistance:1000MΩ(min)
 Contact resistance: ≤10mΩ
 After environmental testing: ≤20mΩ
 Series No.
 Category:wafer
 Welding Board Angle:180°
 Welding Way: DIP
 Material: PBT 94V-0
 Material(Pin):Brass
 Planting Category:Tin-Plated
 Color: Natural Color
 All materials must meet XI BANG requirement for environment protection.



Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	M	L		M	L
2*01	---	6.65	2*07	18.00	24.65
2*02	3.00	9.65	2*08	21.00	27.65
2*03	6.00	12.65	2*09	24.00	30.65
2*04	9.00	15.65	2*10	27.00	33.65
2*05	12.00	18.65	2*11	30.00	36.65
2*06	15.00	21.65	2*12	33.00	39.65

Ordering Information

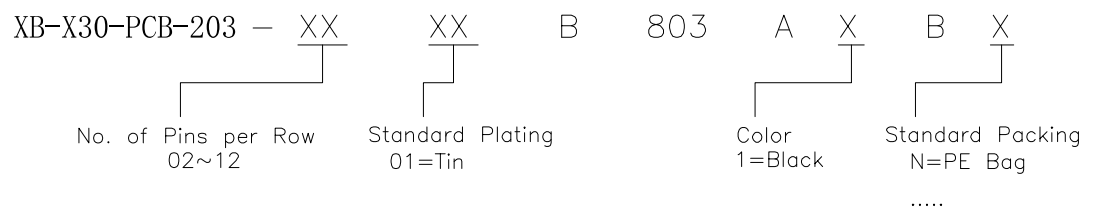

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X.*±/	X.±/
.X*±/	.X±0.30
.XX*±/	.XX±0.20
.XXX*±/	.XXX±0.10

DESIGN:
CHECKED:
AUDITED:

DATE:
DATE:
DATE:

DWG. NO.
XB-X30-PCB-203
PART NO.

TITLE:
3.00 mm Crimp Style Connectors

REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
---------	----------	------------	-----------	--