
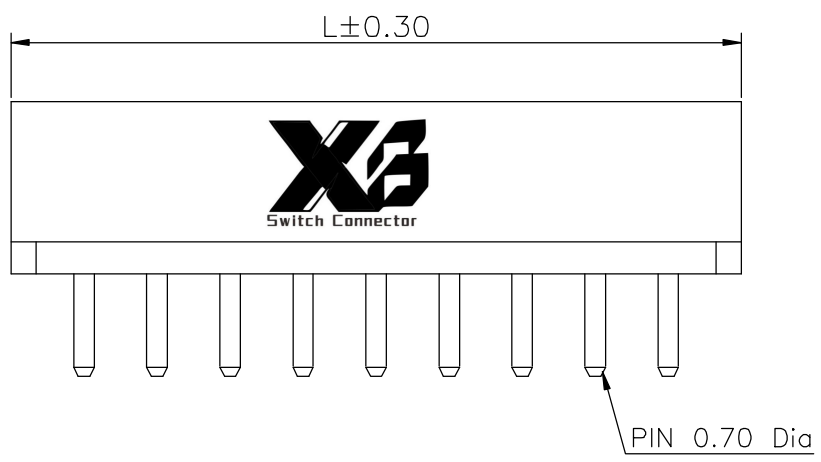
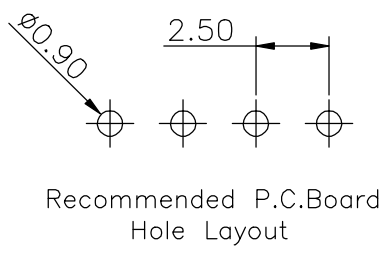


1 2 3 4 5 6 7 8 9

F
E
D
C
B
A

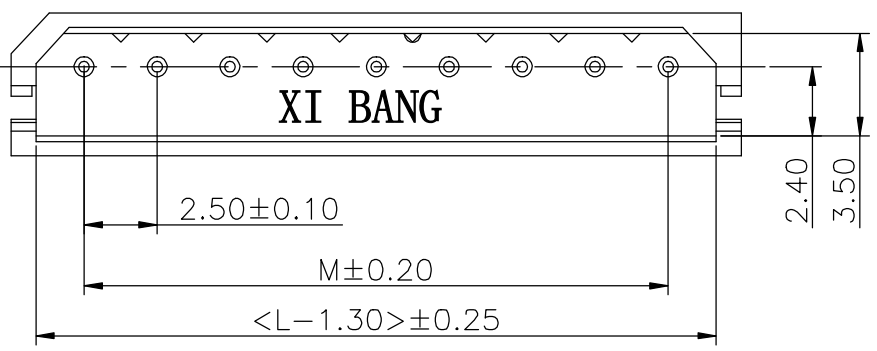

Specifications
 Current Rating: 3.0Amp (AC/DC)
 Voltage Rating: 250V(AC/DC)
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 800V AC/Minute
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -25°C to +80°C
Materials
 Contact Material: Brass
 Insulator Material: Thermoplastic, UL 94V-0
 Nylon 66 or the equivalent material
 All materials must meet XI BANG requirement for environment protection.

No. of PIN/ROW	Dimension Information	
	M	L
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

Ordering Information
 XB-X25-PCB-106

No. of Pins per Row: 02~16
 Standard Plating: 01=Tin
 Color: 1=BLACK, 2=White
 Standard Packing: A=box, C=Tube
 Selective Packing: C=Tube

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO. XB-X25-PCB-106	TITLE. WAFER FOR PITCH 2.50 STRAIGHT
	X. \pm 5.0'	X. \pm 0.30	CHECKED:	DATE:		
	.X \pm 3.0'	.X \pm 0.25	AUDITED:	DATE:	PART NO.	
	.XX \pm 2.0'	.XX \pm 0.15				
REV. 03	UNIT. mm	SCALE. 4:1	PAGE. 1/1			

1 2 3 4 5 6 7 8 9