
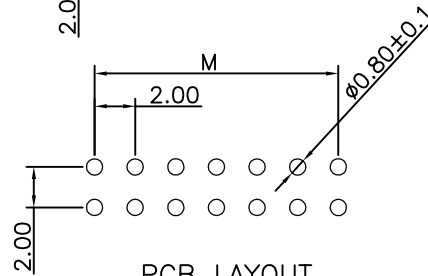
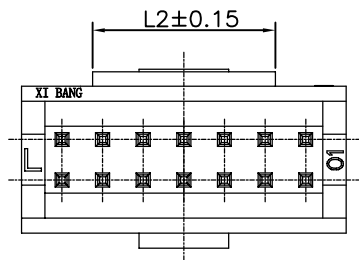



Specifications
 Current Rating:3.0A AC DC
 Voltage Rating:250V AC DC
 Insulation Resistance:≥1000MΩ Min.
 Dielectric Withstanding Voltage:1000V AC/minute
 Contact Resistance:≤30mΩ Max.
 Operating Temperature:-25°C to +85°C
 Materials
 Contact Material:Brass
 Insulation Material:UL94V-0 LCP
 All materials must meet XI BANG
 hazardous substances control standards.

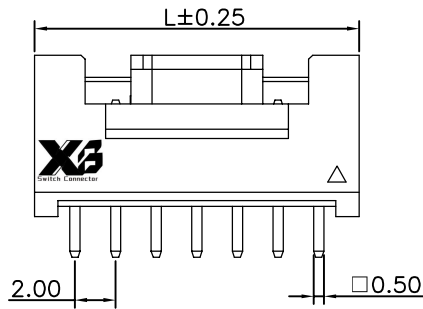

No. of PIN/ROW	M	L1	L	L2	E
02	2.00	4.95	6.00	3.00	小盖 (4.5)
03	4.00	6.95	8.00	3.00	大盖 (6.5)
04	6.00	8.95	10.00	3.00	
05	8.00	10.95	12.00	5.00	
06	10.00	12.95	14.00	7.00	
07	12.00	14.95	16.00	9.00	
08	14.00	16.95	18.00	11.00	
09	16.00	18.95	20.00	13.00	
10	18.00	20.95	22.00	15.00	
11	20.00	22.95	24.00	17.00	
12	22.00	24.95	26.00	19.00	
13	24.00	26.95	28.00	21.00	
14	26.00	28.95	30.00	23.00	
15	28.00	30.95	32.00	25.00	
16	30.00	32.95	34.00	27.00	

Ordering Information

XB-X20-PCB-218-A001

A 001 C X B X

No. of Pins per Row Standard Plating
 02~16 01=Tin

Color
 2=White

Standard Packing
 D=T&R
 F=CAP+T&R

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.50
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.20
.XXX'±/	.XXX±/

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 XB-X20-PCB-218-A001
 PART NO.

TITLE.
 2.0mm pitch
 180°Wafe DIP TYPE

REV. A UNIT. mm SCALE. 1:1