
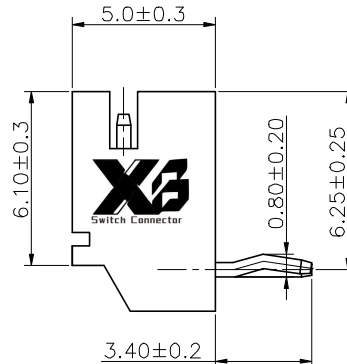


Specifications

Current Rating: 2Amp AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding Voltage: 800VAC
 Temperature Range: -40°C to +105°C
Materials
 Contact Material: Brass
 Insulator Material: PA66 UL 94V-0
 All materials must meet XI BANG hazardous substances control standards.

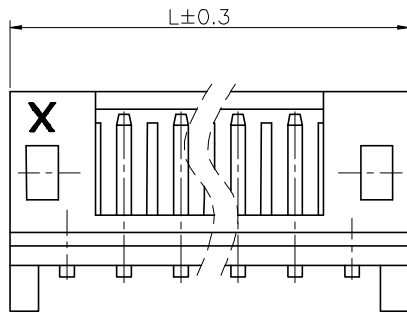

CIRCUITS	L	M	CIRCUITS	L	M
02	6.00	2.00	10	22.00	18.00
03	8.00	4.00	11	24.00	20.00
04	10.00	6.00	12	26.00	22.00
05	12.00	8.00	13	28.00	24.00
06	14.00	10.00	14	30.00	26.00
07	16.00	12.00	15	32.00	28.00
08	18.00	14.00	16	34.00	30.00
09	20.00	16.00			

Ordering Information

XB-X20-PCB-123-A001 - XX XX A 001 E X Z X-9B

No. of Pins per Row
02~16

Standard Plating
01=Tin

Color
1=Black
2=White

Standard Packing
N=PE Bag
Standard Packing
D=Tape&Reel

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE	
X'±	X±
.X'±	.X±0.25
.XX'±	.XX±0.20
.XXX'±	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:


DWG. NO.
XB-X20-PCB-123-A001
PART NO.

TITLE:
2.0mm pitch 90° DIP type


REV.	UNIT.	SCALE.	PAGE.
B	mm	1:1	1/1

1 2 3 4 5 6 7 8 9


F

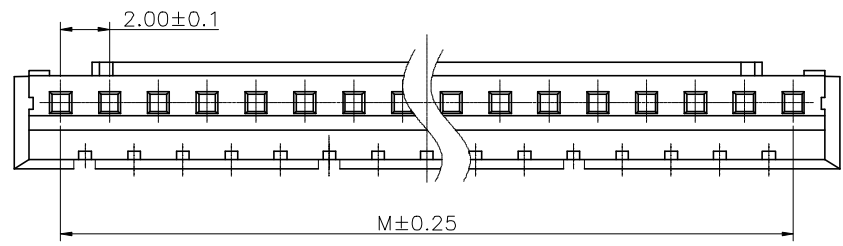


E

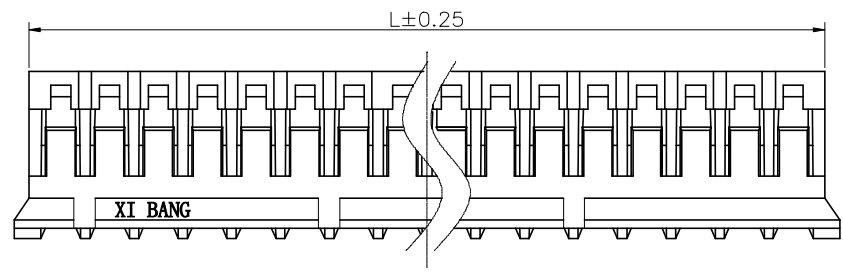


D



C

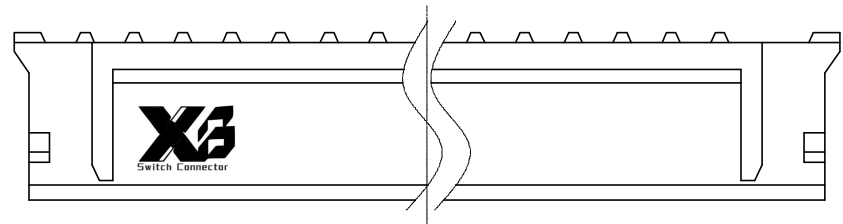

B

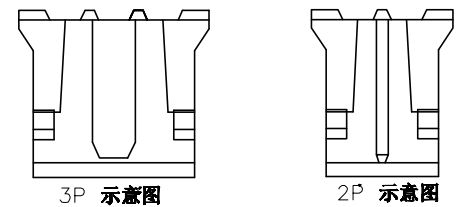

Specifications
 Voltage rating:100V AC/DC
 Current Rating:2A AC/DC
 Withstanding Voltage:800V AC
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 After environmental testing: ≤20mΩ
 Operating Temperature:-25°C to +85°C
 Materials
 Insulator Material:PA66 94V-0
 All materials must meet XI BANG hazardous substances control standards.

F

E

D

C

B

Ordering Information

XB-X20-PCB-123-A001M - XX A XX

No. of Pins
02~16

Materials /Color
M=YN66/White
M1=YN66/Black

Pins	Dimensions(mm)	
	M	L
2	2.00	4.60
3	4.00	6.60
4	6.00	8.60
5	8.00	10.60
6	10.00	12.60
7	12.00	14.60
8	14.00	16.60
9	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60

A

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1

GENERAL TOLERANCE	
X.'±	X.±
.X'±2.0'	.X±0.30
.XX'±1.0'	.XX±0.20
.XXX'±	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-X20-PCB-123-A001M
PART NO.

TITLE:
Pitch 2.0 Housing

A

1 2 3 4 5 6 7 8 9

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F



E

D




C

B

A

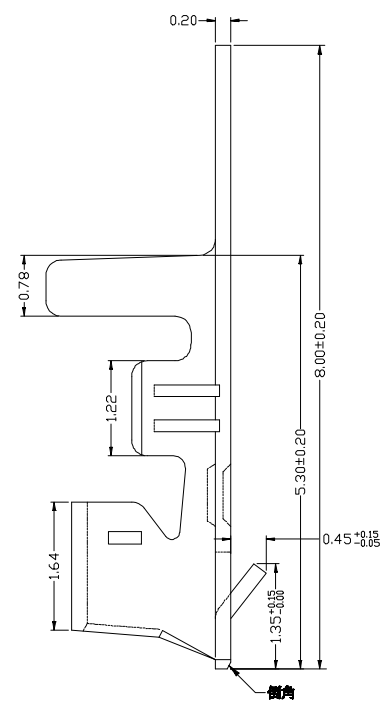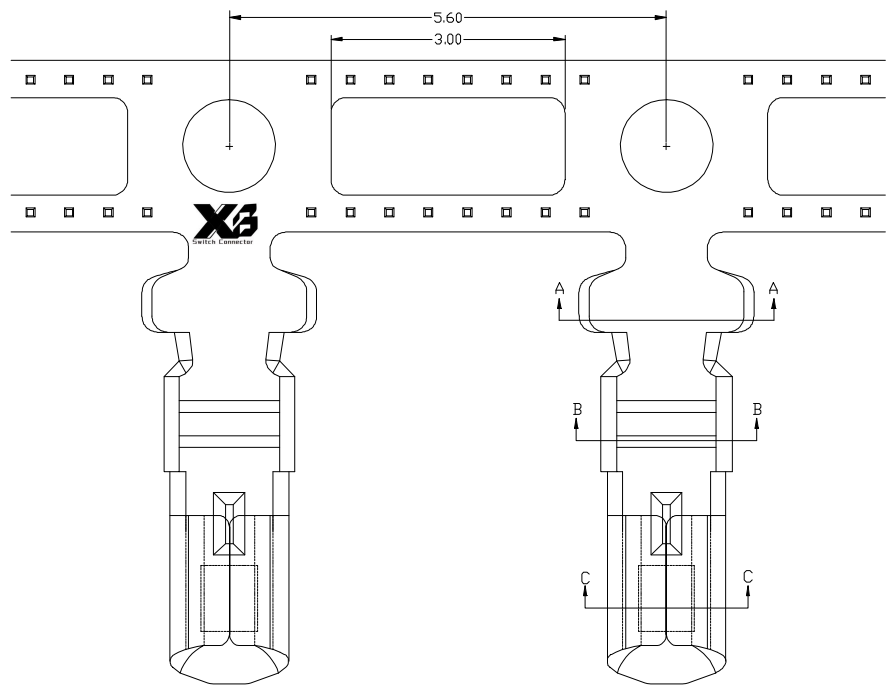

Materials
 Insulator Material: Phosphor Bronze
 Finish: Tin-plated
 wire range: AWG#24-32
 All materials must meet XI BANG
 hazardous substances control standards.



Ordering Information

XB-X20-PCB-123-A001D XX

XX

Standard Plating
 01=Tin
 02=Gold Flash

Materials
 AB=Phosphor bronze

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD				
REV.	UNIT.	SCALE.	PAGE.	
B	mm	1:1	1/1	

GENERAL TOLERANCE	
X.±	X.±/
.X'±	.X±0.40
.XX'±	.XX±0.35
.XXX'±	.XXX±0.15

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	XB-X20-PCB-123-A001D
PART NO.	

TITLE.
Pitch 2.00mm Crimp Style Connectors

1 2 3 4 5 6 7 8 9