






Specifications
 Voltage Rating:150V,AC,DC
 Insulation Resistance:100MΩ Min.
 Dielectric Withstanding Voltage:500V, AC/Minute
 Contact Resistance:30mΩ Max.
 Operating Temperature:-25°C to +85°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic,
 UL 94V-0 Nylon 9T or the equivalent material
 All materials must meet XI BANG requirement
 for environment protection.

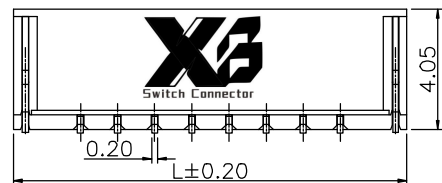


剖面 A-A

Ordering Information

XX XX A 001 D X A X
 No. of Pins per Row 02~15 Standard Plating 22=Matte Tin
 Color 5=米黄色 2=White
 Standard Packing D=T&R ...

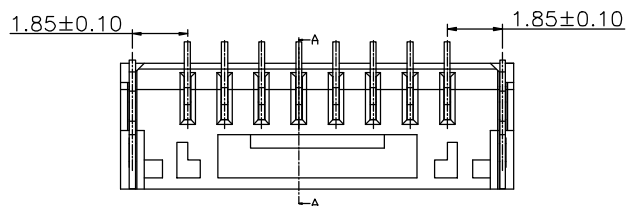

嵌合狀態

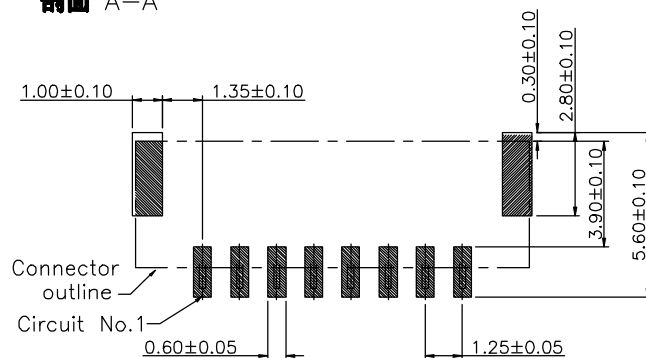

PCB寸法
 PCB Layout

No. of PIN/ROW	Dimension Information		
	M	L1	L
2	1.25	3.85	5.75
3	2.50	5.10	7.00
4	3.75	6.35	8.25
5	5.00	7.60	9.50
6	6.25	8.85	10.75
7	7.50	10.10	12.00
8	8.75	11.35	13.25
9	10.00	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00

3	焊片 Fitting Nail	Phosphor Bronze	2
2	端子 Contact	Phosphor Bronze	n*1
1	基座 Wafer	PA9T(UL94V-0)	1
No.	PART NAME	MATERIAL	Q'TY

REV.					UNIT.		SCALE.		PAGE.		GENERAL TOLERANCE		DESIGNED:		DATE:		DWG. NO.		TITLE.	
01					mm		1:1		1/1		X:±5.0'		X:±0.30				XB-X125-PCB-M-101-A001		1.25 mm 立贴 connectors	
											.X'±3.0'		.X±0.25		CHECKED:		DATE:			
											.XX'±2.0'		.XX±0.20		APPROVED:		DATE:			
											.XXX'±1.0'		.XXX±0.10							

1 2 3 4 5 6 7 8 9

F




E

D

C




B

A

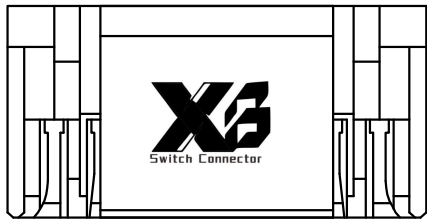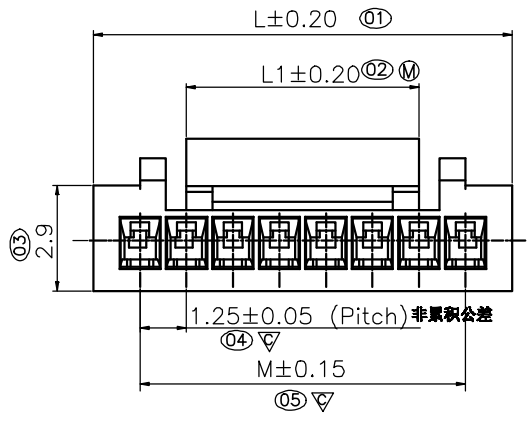


插线状态

NOTES:
 1. MATERIAL: PBT UL94V-0
 2. RATING
 2-1. OPERATING TEMPERATURE: -25~85°C
 2-2. OPERATING VOLTAGE: 150V AC/DC
 2-3. CURRENT RATING: 1.0 AMPS
 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 2-5. INSULATION RESISTANCE: 100MΩ Min;
 2-6. CONTACT RESISTANCE: 0.03Ω Max;
 註:
 1. 標示 * 為全尺寸測量部位。
 2. 標示 M 為首件與尾件測量部位。
 3. 標示 ▽ 為首件、尾件與過程測量部位。
 4. 所有材料必須滿足GREENCONN有害物質管控標準。

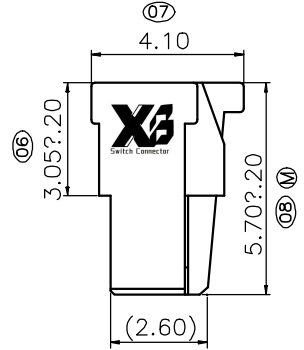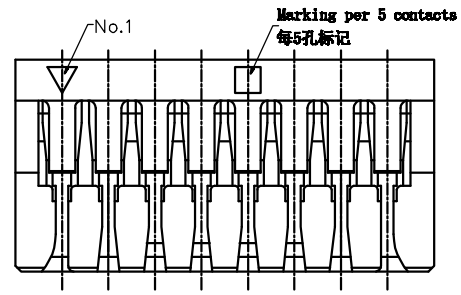

剖面 A-A

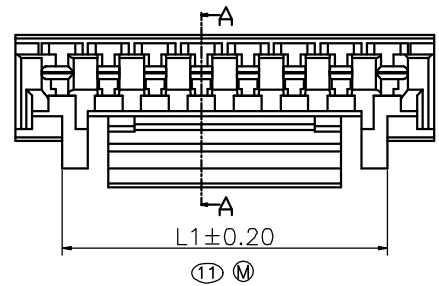

NO. OF PINS/ROW	M	L1	L	L2
2	1.25	2.0	3.75	—
3	2.5	3.2	5	—
4	3.75	4.25	6.25	—
5	5	4.25	7.5	—
6	6.25	6.25	8.75	—
7	7.5	6.25	10	—
8	8.75	6.25	11.25	8.75
9	10	6.25	12.5	10
10	11.25	8.2	13.75	11.25
11	12.5	8.2	15	12.5
12	13.75	8.2	16.25	13.75
13	15	8.2	17.5	15
14	16.25	8.2	18.75	13.75
15	17.5	8.2	20	15
18	21.25	8.2	23.75	10.7
20	23.75	8.2	26.25	10.7

Ordering Information

XB-X125-PCB-M-101-A001M - XX A X

No. of Pin/Row
02 ~ 20

Material/Color
A=PBT/Black
A4=PBT/White

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG PROJ.
 3
 1/2

REV. 01 UNIT. mm SCALE. 1:1

GENERAL TOLERANCE	
X. 停 /	X.? /
.X 停 /	.X?.30 /
.XX 停 /	.XX?.20 /
.XXX 停 /	.XXX?. 10 /

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 XB-X125-PCB-M-101-A001M
 PART NO.

1.25mm WTB CONN. SINGLE ROW HOUSING

06

1 2 3 4 5 6 7 8 9

F


E

D

C


B

A

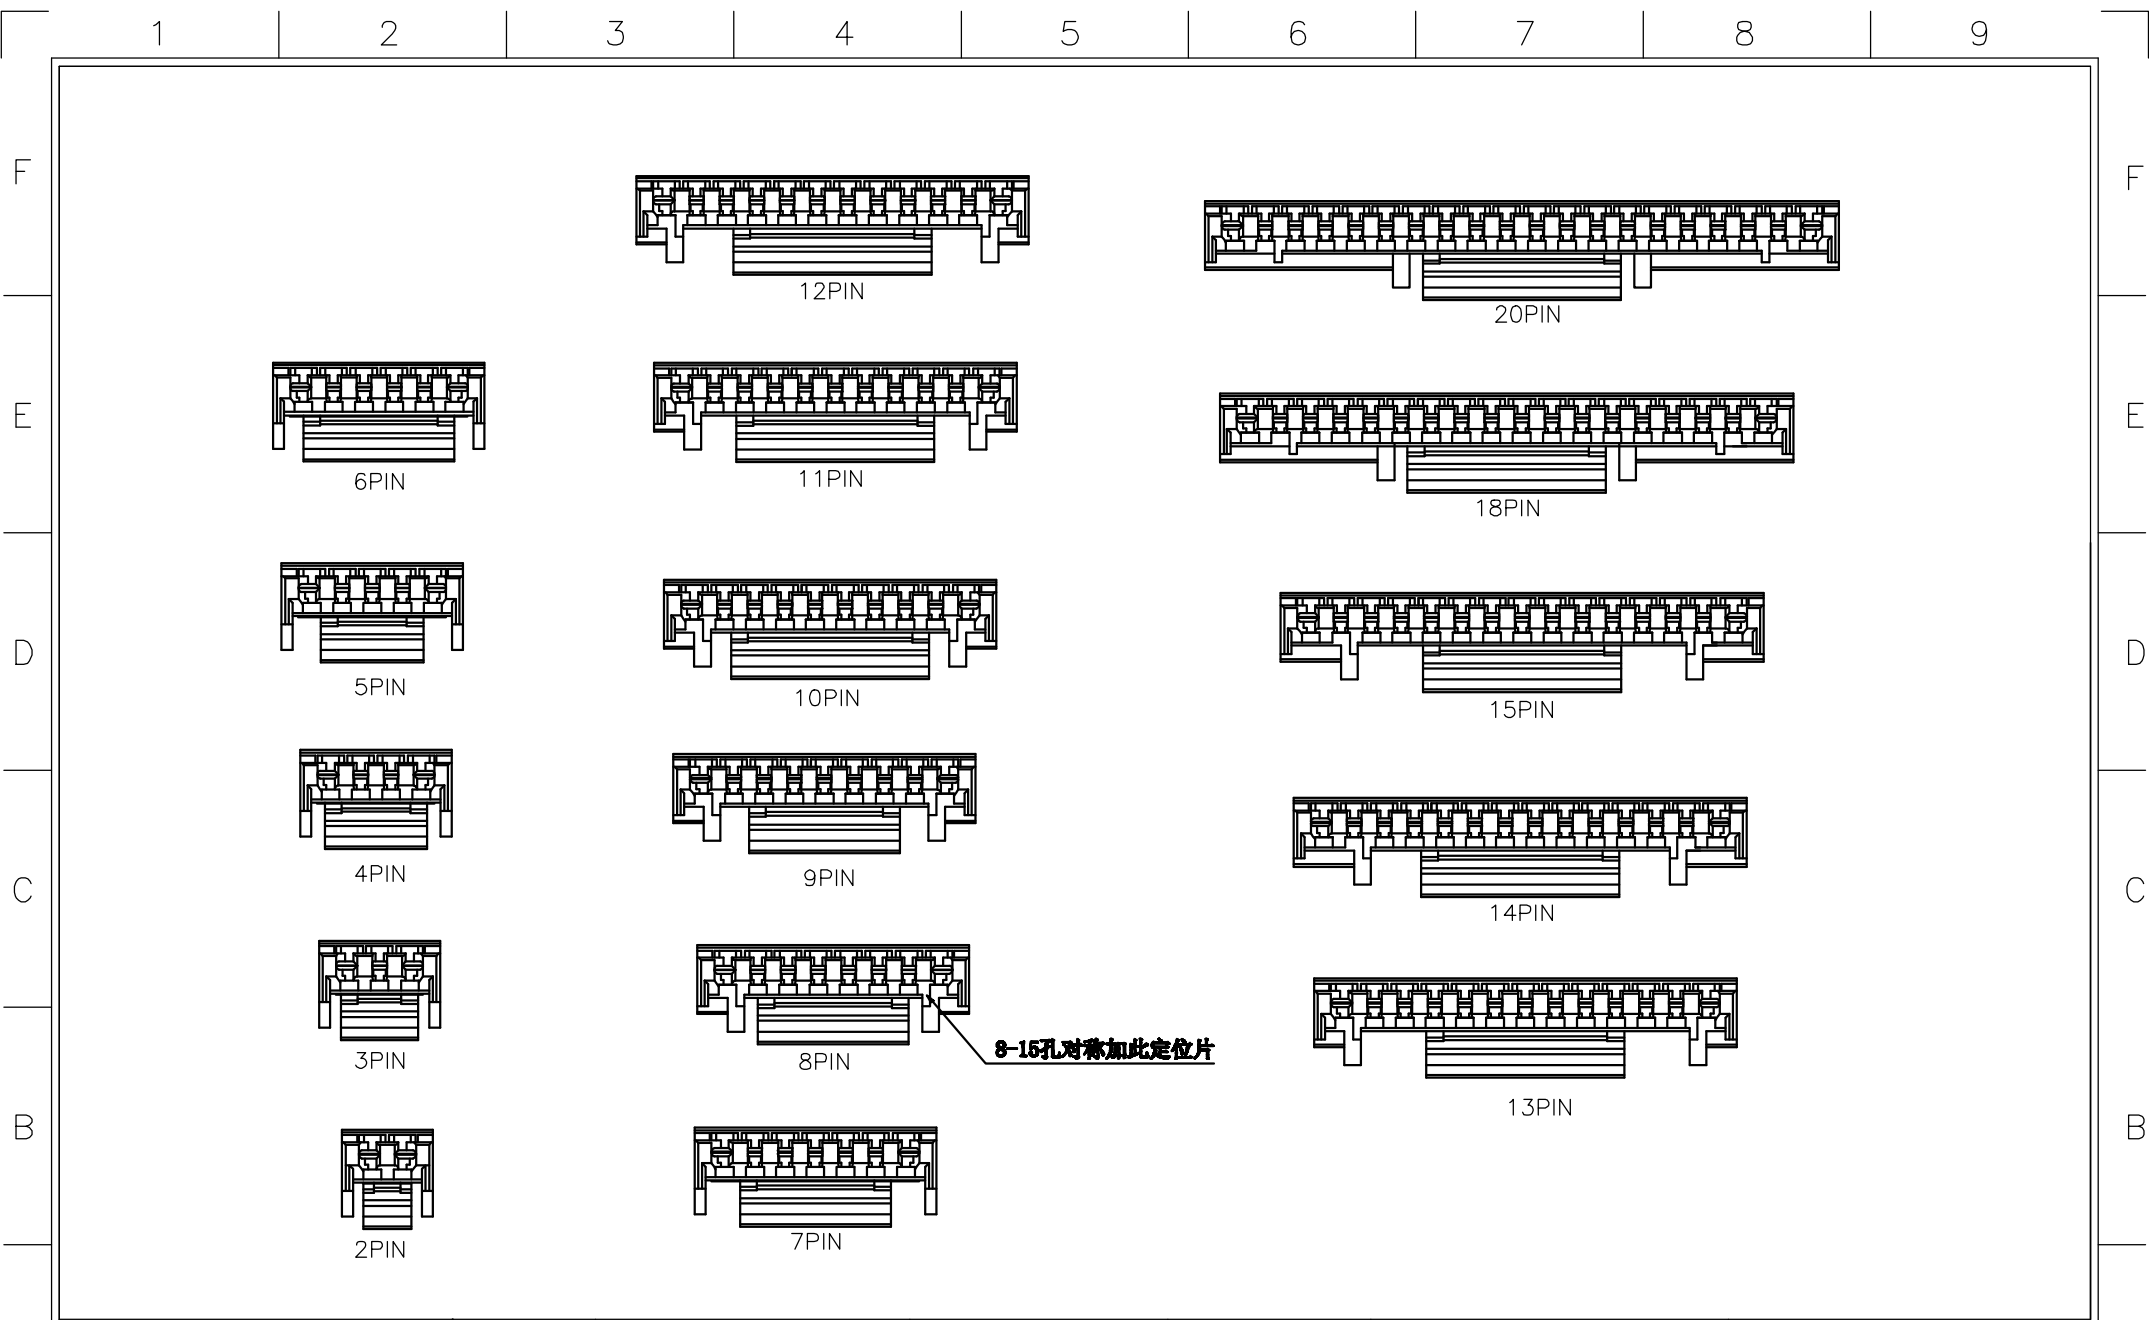

8-16孔对称加此定位片

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.

PAGE. 2/2

GENERAL TOLERANCE	
X.停 /	X.?
.X停 /	.X?.30
.XX停 /	.XX?.20
.XXX停 /	.XXX?. 10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-X125-PCB-M-101-A001M
PART NO.

1.25mm WTB CONN. SINGLE ROW HOUSING

REV. 01	UNIT. mm	SCALE. 1:1
---------	----------	------------

1 2 3 4 5 6 7 8 9

F




E

D

C


B

A

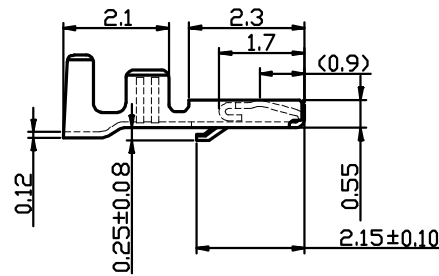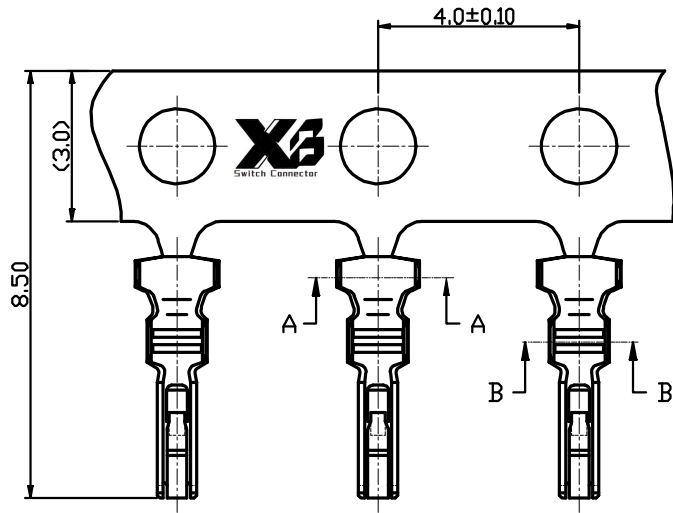


NOTES:


1. MATERIAL :PHOSHPOR BRONZE
2. PLATING :PLEASE SEE PART NUMBER
3. RATING
 - 3-1. OPERATING TEMPERATURE:-25~85°C
 - 3-2. OPERATING VOLTAGE: 150V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE:100MΩ Min;
 - 3-6. CONTACT RESISTANCE:0.03Ω Max;



SEC:A-A



SEC:B-B



Ordering Information

- 01 XX XX

Standard Plating
01=Tin
02=Gold flash

Materials
AB=Phosphor Bronze

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD	3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE.
		X.位 /	X.?	CHECKED:	DATE:	XB-X125-PCB-M-101-A001D	
		.XX位 /	.XX?.25	APPROVED:	DATE:	PART NO.	
REV. A	UNIT. mm	SCALE. 1:1					1.25mm Pitch WTB PLUG CRIMP TERMINAL

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A