

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F




E

D



C

B



A

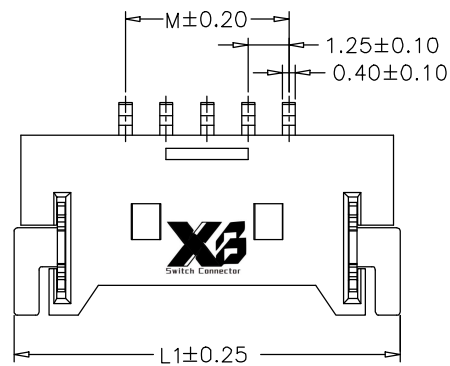

Specifications
 Current Rating:1A AC/DC
 Voltage Rating:125V AC/DC
 Insulation Resistance:100MΩ Min.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material: PA9T UL 94V-2
 All materials must meet XI BANG hazardous substances control standards.

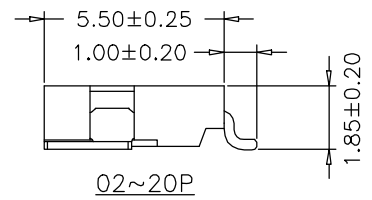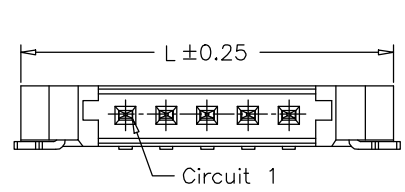

PART NO.	Dimensions			PART NO.	Dimensions		
	M	L	L1		M	L	L1
02P	1.25	7.65	7.77	10P	11.25	17.65	17.77
03P	2.50	8.90	9.02	11P	12.50	18.90	19.02
04P	3.75	10.15	10.27	12P	13.75	20.15	20.27
05P	5.00	11.40	11.52	14P	16.25	22.65	22.77
06P	6.25	12.65	12.77	15P	17.50	23.90	24.02
07P	7.50	13.90	14.02	16P	18.75	25.15	25.27
08P	8.75	15.15	15.27	20P	23.75	30.15	30.27
09P	10.00	16.40	16.52				

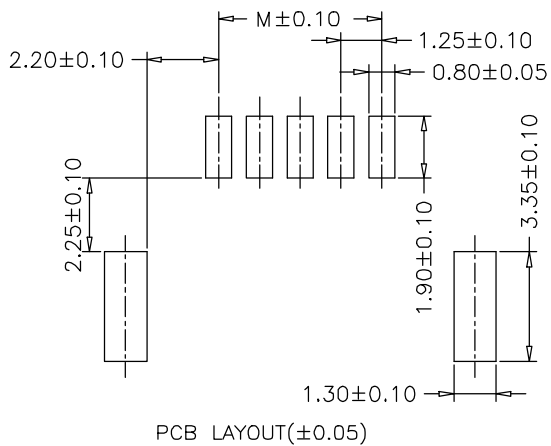

Ordering Information

XB-X125-PCB-124-A001 - XX XX A 001 J X B X

No. of Pins per Row
SEE TABLE





Standard Plating
01=Tin
.....

Color
1=Black
2=White
.....


Standard Packing
D=Tape&Reel
Selective Packing
C=Tube

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-X125-PCB-124-A001	TITLE. Pitch 1.25mm Wafer
					X.±	X.±				
REV. A UNIT. mm SCALE. 1:1 PAGE. 1/1					.X'±	.X±0.25	CHECKED:	DATE:	PART NO.	
					.XX'±	.XX±0.15	APPROVED:	DATE:		
					.XXX'±	.XXX±0.10				

1 2 3 4 5 6 7 8 9

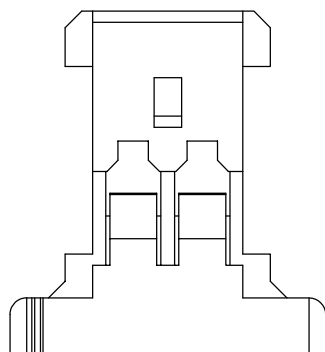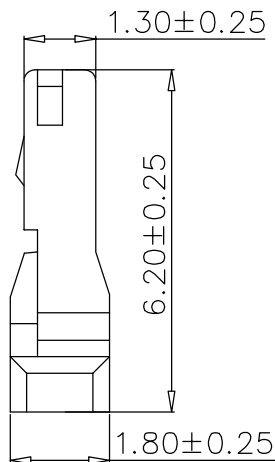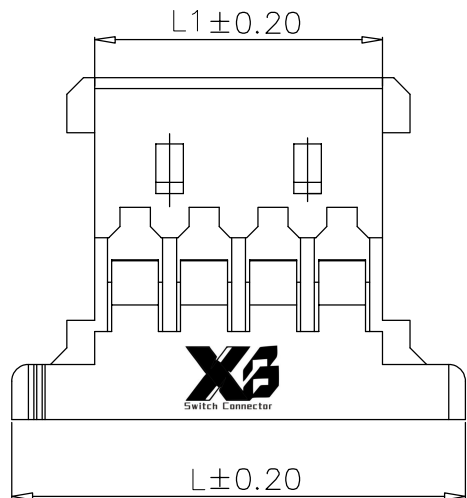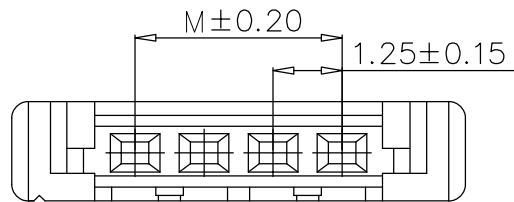

2PIN 图示

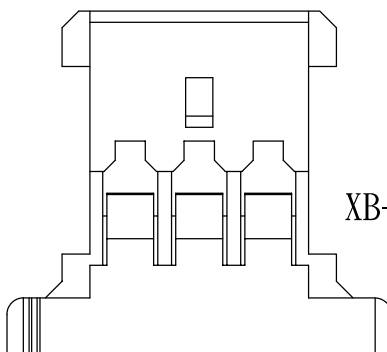

3PIN 图示

Specifications

Voltage Rating;125V AC/DC

Current Rating:1A AC/DC

Withstanding Volatge:500V AC/minute

Operating Temperature:-40°C to +105°C

Insulation Resistance:100MΩ Min.

Contact Resistance:20mΩ Max.

Insulator Material: PA66 UL94V-0

TABLE:

No. of Pin/Row	DIMENSION		
	M	L1	L
02	1.25	2.72	5.72
03	2.50	3.97	6.97
04	3.75	5.22	8.22
05	5.00	6.47	9.47
06	6.25	7.72	10.72
07	7.50	8.97	11.97
08	8.75	10.22	13.22
09	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
13	15.00	16.47	19.47
14	16.25	17.72	20.72
15	17.50	18.97	21.97
16	18.75	20.22	23.22
18	21.25	22.72	25.72
20	23.75	25.22	28.22
22	26.25	27.72	30.72
24	28.75	30.22	33.22
26	31.25	32.72	35.72
28	33.75	35.22	38.22
30	36.25	37.72	40.72

XB-X125-PCB-124-A001M - XX

A


X

No. of Pin/Row
SEE TABLE

Material/Color
M=Nylon66/White
M1=Nylon66/Black

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X.?
.X 停 /	.X?.25
.XX 停 /	.XX?.20
.XXX 停 /	.XXX?. 15

DESIGNED:

DATE:

DWG. NO.

XB-X125-PCB-124-A001M

TITLE:

1.25mm Pitch Housing

CHECKED:

DATE:

PART NO.






APPROVED:

DATE:

REV. A

UNIT. mm

SCALE. 1:1

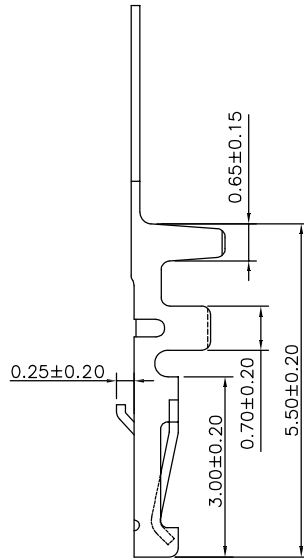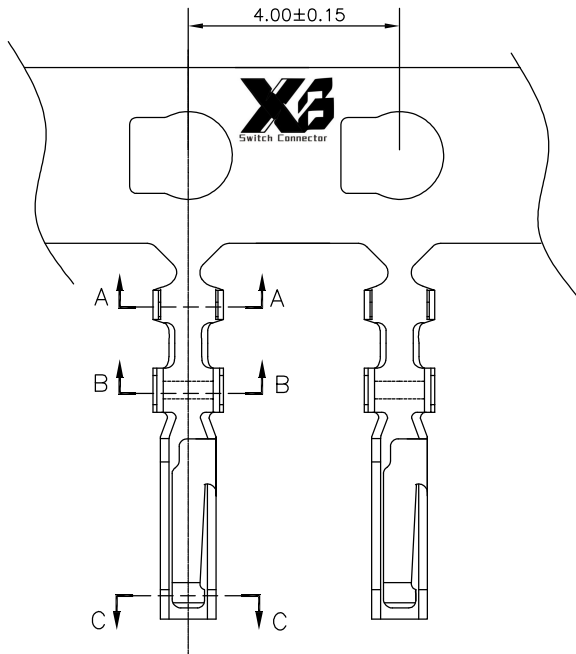

Note:
Material:PHOSPHOR BRONZE
Wire Range:AWG#28-32
Insulation O.D.:1.2mm(Max)

Ordering Information

XB-X125-PCB-124-A001D XX


AB

Standard Plating
01=Tin
02=Gold Flash

Materials
AB=Phosphor bronze

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.倅 /	X.?
.X倅 /	.X?.30
.XX倅 /	.XX?.20
.XXX倅 /	.XXX?. 15

DESIGNED:

DATE:

DWG. NO.

XB-X125-PCB-124-A001D

TITLE.

1.25mm Pitch Terminal

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV. A

UNIT. mm

SCALE. 1:1