
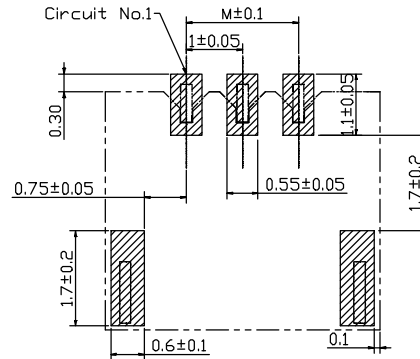
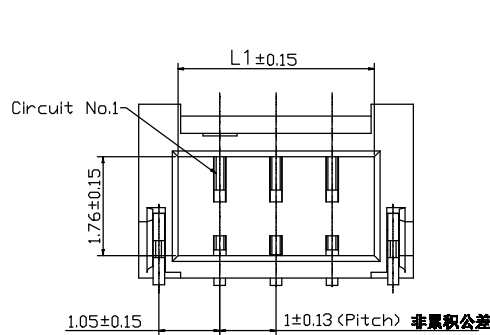
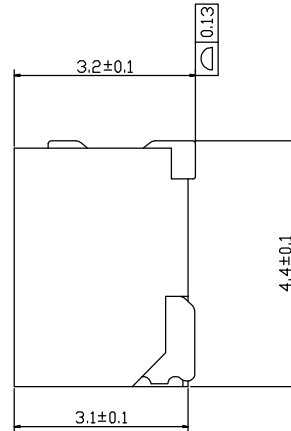


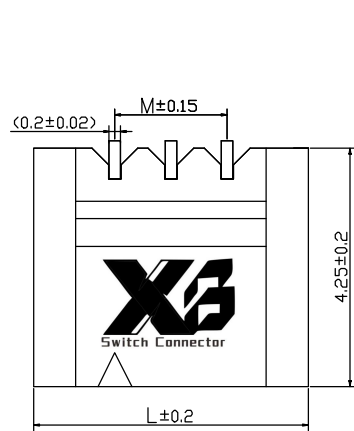

PCB寸法
PCB Layout

NOTES:

1. MATERIAL

- 1-1. HOUSING: PA9T (UL94V-0)
1-2. CONTACT: PHOSPHOR BRONZE
1-3. FITTING NAIL: PHOSPHOR BRONZE

2. PLATING: SEE PART NUMBER

3. RATING

- 3-1. OPERATING TEMPERATURE: -25~85°C
3-2. OPERATING VOLTAGE: 150V AC/DC
3-3. CURRENT RATING: 1.0 AMPS
3-4. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
3-5. INSULATION RESISTANCE: 100 MΩ Min;
3-6. CONTACT RESISTANCE: 0.03Ω Max;

No of PIN/Row	Dimensions		
	M	L1	L
2	1.0	2.5	3.9
3	2.0	3.5	4.9
4	3.0	4.5	5.9
5	4.0	5.5	6.9
6	5.0	6.5	7.9
7	6.0	7.5	8.9
8	7.0	8.5	9.9
9	8.0	9.5	10.9
10	9.0	10.5	11.9
11	10.0	11.5	12.9
12	11.0	12.5	13.9
13	12.0	13.5	14.9
14	13.0	14.5	15.9
15	14.0	15.5	16.9
16	15.0	16.5	17.9
17	16.0	17.5	18.9
18	17.0	18.5	19.9
19	18.0	19.5	20.9
20	19.0	20.5	21.9

- XX XX A 001 D X A X

No. of Pins per Row 02~20


Standard Plating
22=Matte Tin
Selective Plating
01=Tin
02=Gold flash
05=Gold flash/Tin

Color
1=Black
2=White

Standard Packing
D=Tape&Reel

X3 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.'±5.0'	X.±/
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.15

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

XB-X10-PCB-107-A001

PART NO.

TITLE.

1.0 WTB CONN. SMT SINGLE ROW RIGHT-ANGLE

REV.	UNIT.	SCALE.
A	mm	1:1

F

E

D

C

B

A

F



E

D

C



B

A

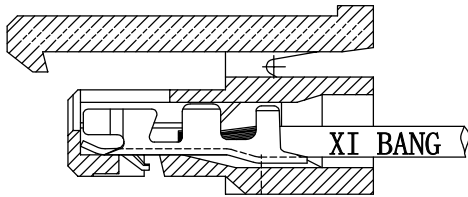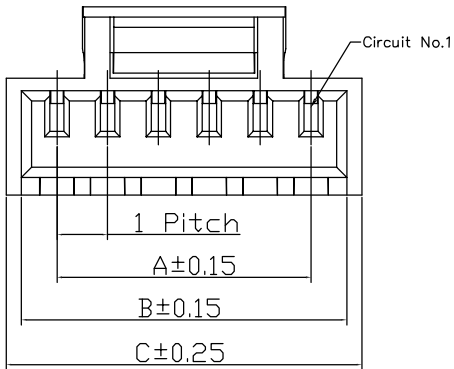


插线状态

- NOTES:
- 1. Insulator Material: PA66 UL 94V-0
 - 2. RATING
 - 2-1. OPERATING TEMPERATURE: -25~85°C
 - 2-2. OPERATING VOLTAGE: 150V AC/DC
 - 2-3. CURRENT RATING: 1.0 AMPS(26#)
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 2-5. INSULATION RESISTANCE: 100 MΩ Min;
 - 2-6. CONTACT RESISTANCE: 0.03Ω Max;

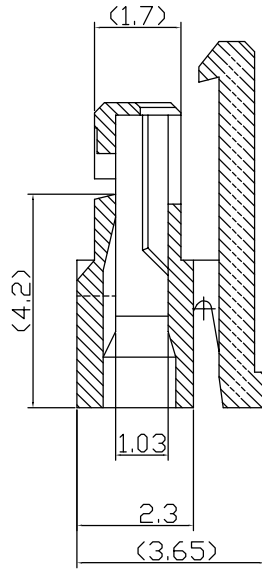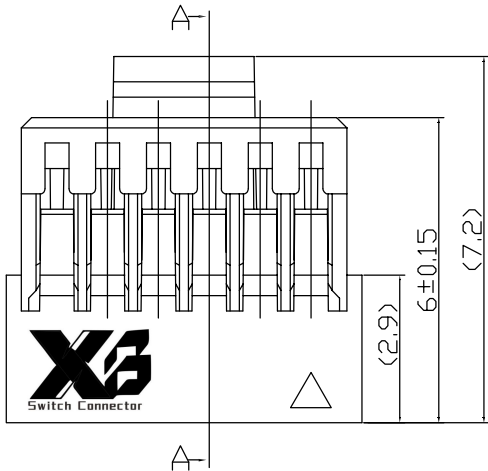

SECTION A-A



XB-X10-PCB-107-A001-M


No. of Pin/Row
02~20

Material/Color
M=Nylon66/White
M1=Nylon66/Black

PIN	A	B	C
2	1.0	2.40	3.00
3	2.0	3.40	4.00
4	3.0	4.40	5.00
5	4.0	5.40	6.00
6	5.0	6.40	7.00
7	6.0	7.40	8.00
8	7.0	8.40	9.00
9	8.0	9.40	10.00
10	9.0	10.40	11.00
11	10.0	11.40	12.00
12	11.0	12.40	13.00
13	12.0	13.40	14.00
14	13.0	14.40	15.00
15	14.0	15.40	16.00
16	15.0	16.40	17.00
17	16.0	17.40	18.00
18	17.0	18.40	19.00
19	18.0	19.40	20.00
20	19.0	20.40	21.00

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 /	X. ?
.X 停 /	.X ? .25
.XX 停 /	.XX ? .20
.XXX 停 /	.XXX ? .15

DESIGNED:

DATE:

DWG. NO.

XB-X10-PCB-107-A001-M

TITLE.

1.0WTB CONN. SINGLE ROW HOUSING

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV. A UNIT. mm SCALE. 1:1

