
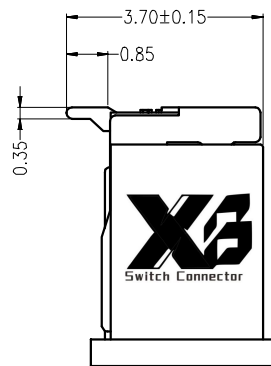


1 2 3 4 5 6 7 8 9

F

F

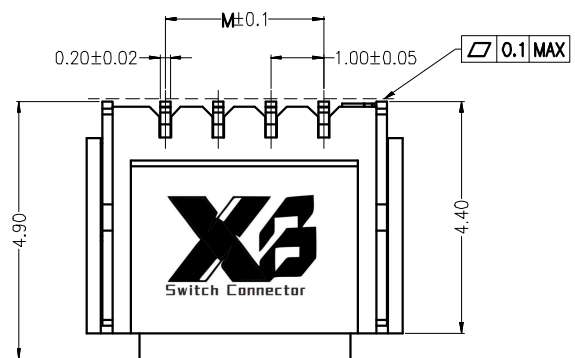

**Specifications:**  
 Current rating:1A AC/DC.  
 Voltage rating:50V AC/DC  
 Temperature range:-40°C~+105°C.  
 Contact resistance:20mΩ Max.  
 Insulation resistance:100MΩ Min.  
 Withstanding voltage: 500V AC/minute.



E

E

No of pins/row	Dimensions	
	M	L
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00


D

D

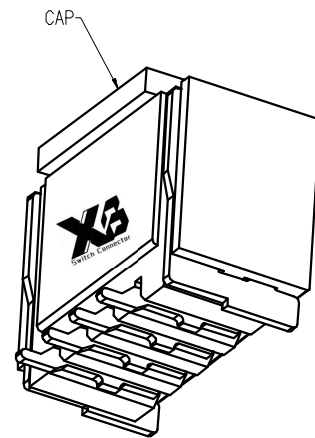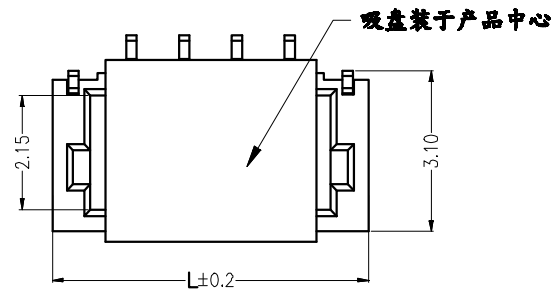

C

C

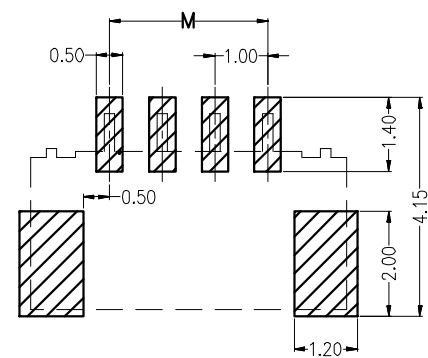

**P. C. B LAYOUT**

**XB-X10-PCB-105 - XX XX A 001 C X B X**

No. of Pins per Row 2~16

Standard Plating  
 22=Matte Tin  
 Selective Plating  
 01=Tin  
 02=Gold flash

Color  
 1=Black  
 2=White

Standard Packing  
 F= CAP+Tape&Reel

B

B

A


A

<b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD	GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO.	TITLE.
	X.±/	X.±/	CHECKED:	DATE:	XB-X10-PCB-105	
	.X'±/	.X±0.25	APPROVED:	DATE:	PART NO.	1.00mm pitch 180° SMT
	.XX'±/	.XX±0.20				
	.XXX'±/	.XXX±0.15				


1 2 3 4 5 6 7 8 9

1 2 3 4 5 6 7 8 9


F

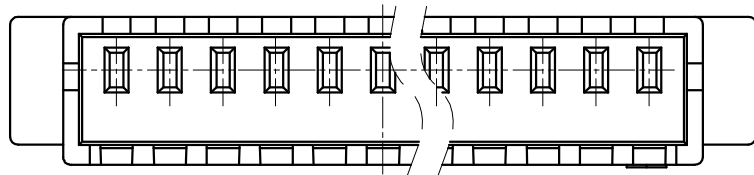


E

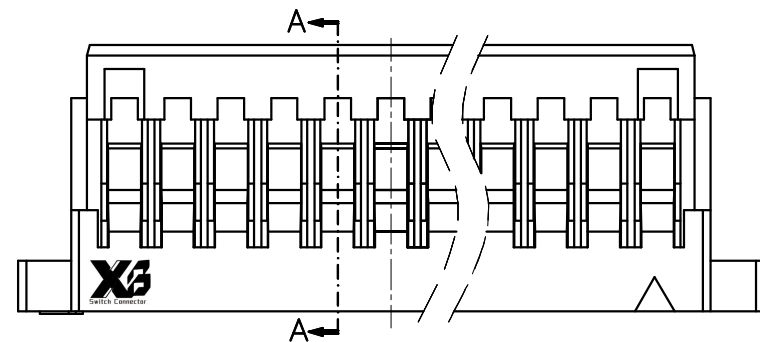

D

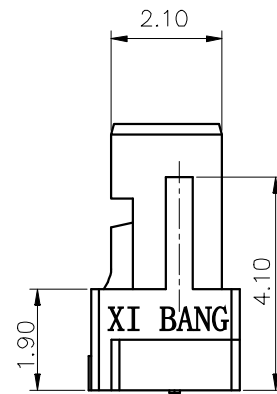

C

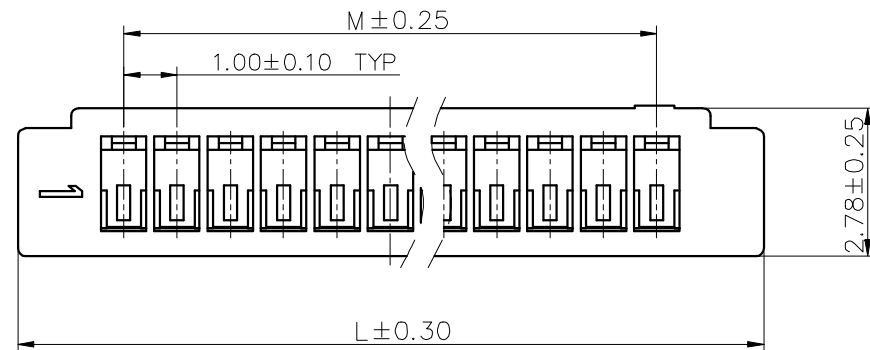

B

Specifications:  
 Current rating: 1A AC/DC.  
 Voltage rating: 50V AC/DC  
 Temperature range: -40°C~+105°C.  
 Contact resistance: 20mΩ Max.  
 Insulation resistance: 100MΩ Min.  
 Withstanding voltage: 500V AC/minute.  
 Material: PA66.UL94V-0.

NO OF PINS/ROW	Dimensions	
	L	M
02	5.00	1.00
03	6.00	2.00
04	7.00	3.00
05	8.00	4.00
06	9.00	5.00
07	10.00	6.00
08	11.00	7.00
09	12.00	8.00
10	13.00	9.00
11	14.00	10.00
12	15.00	11.00
13	16.00	12.00
14	17.00	13.00
15	18.00	14.00
16	19.00	15.00

A




**XB-X10-PCB-105M - XX A X**

**No. of Pin/Row**  
02 ~ 16




**Material/Color**  
**M=NYLON66/White**  
**M1=NYLON66/Black**  
**NF=NYLON66/Transparent**

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-X10-PCB-105M	TITLE. <b>1.00mm Pitch Housing</b>
		X.停 /	X.?				
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.X停 /	.X?.30	PART NO.	
				.XX停 /	.XX?.20		
				.XXX停 /	.XXX?. 15		

1 2 3 4 5 6 7 8 9

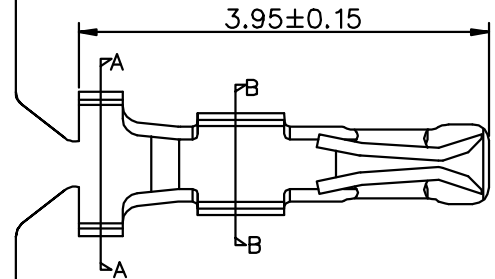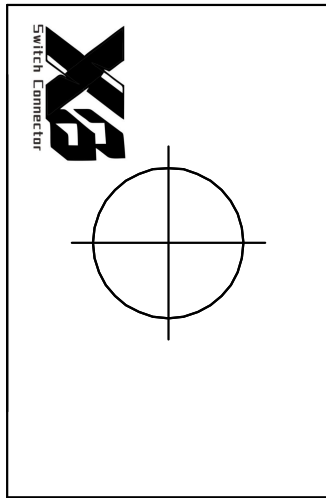

**Specifications:**  
**Terminal Material:** Phosphor Bronze  
**Wire range:** AWG#28-32  
**Insulation O.D:** 0.80mm(Max)  
**Qty/Reel:** 20000PCS

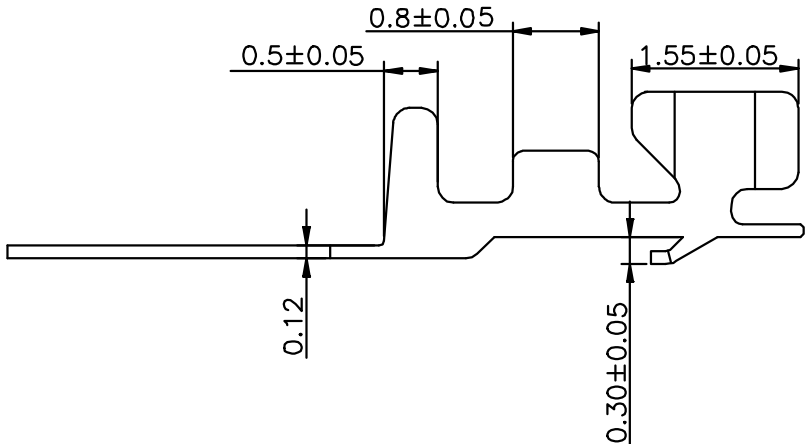

**Ordering Information**

**XB-X10-PCB-105-D XX AB**

Standard Plating  
 01=Tin  
 02=Gold flash

Materials  
 AB=Phosphor Bronze

**东莞市溪榜电子有限公司**  
 DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG  
 PROJ.  
 PAGE. 1/1

GENERAL TOLERANCE	
X.位 /	X.?
.X位 /	.X?.25
.XX位 /	.XX?.20
.XXX位 /	.XXX?. 15

DESIGNED: \_\_\_\_\_ DATE: \_\_\_\_\_  
 CHECKED: \_\_\_\_\_ DATE: \_\_\_\_\_  
 APPROVED: \_\_\_\_\_ DATE: \_\_\_\_\_

DWG. NO.  
**XB-X10-PCB-105-D**  
 PART NO.

TITLE.  
**1.0mm Pitch Terminal**

REV. **A** UNIT. mm SCALE. 1:1