

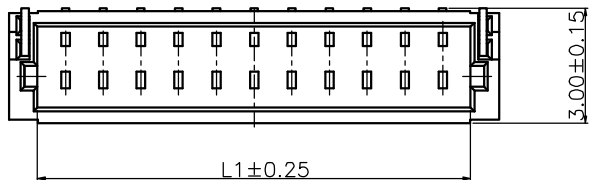


1 2 3 4 5 6 7 8 9

F

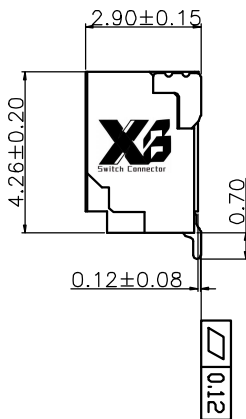

E

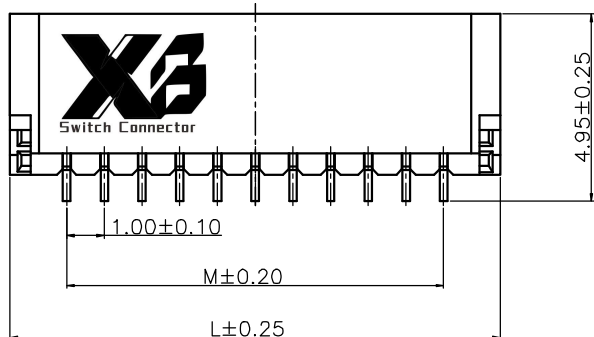

SPECIFICATIONS


Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100M Ω Min.
 Withstanding Voltage: 500V AC/minute
 Terminal: Brass
 Solder Tabs: Brass
 Material: Nylon 9T,UL94V-0
 All materials must meet XI BANG requirement for environment protection

D

No. of PIN/ROW	Dimension Information		
	M	L	L1
02	1.00	4.00	2.50
03	2.00	5.00	3.50
04	3.00	6.00	4.50
05	4.00	7.00	5.50
06	5.00	8.00	6.50
07	6.00	9.00	7.50
08	7.00	10.00	8.50
09	8.00	11.00	9.50
10	9.00	12.00	10.50
11	10.00	13.00	11.50
12	11.00	14.00	12.50
13	12.00	15.00	13.50
14	13.00	16.00	14.50
15	14.00	17.00	15.50
16	15.00	18.00	16.50
17	16.00	19.00	17.50
18	17.00	20.00	18.50
19	18.00	21.00	19.50
20	19.00	22.00	20.50

C

Recommended P.C.Board Layout
 (Tolerance:±0.05)

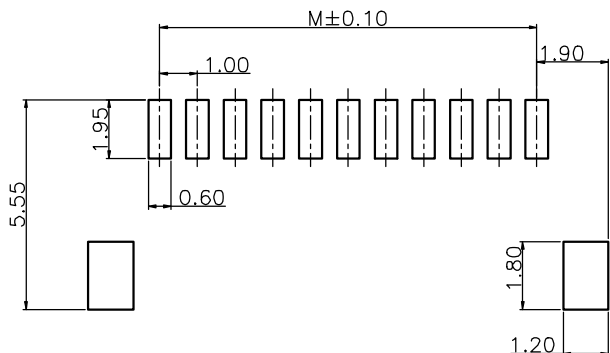

B

Ordering Information
XB-X10-PCB-101

No. of Pins per Row 02~20 Standard Plating 01=Tin ...
 Color 2=White ... Standard Packing D=Tape Reel ...

A

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 01 UNIT. mm SCALE. 4:1 PAGE. 1/1

GENERAL TOLERANCE	
X.'±5.0'	X.±0.50
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGN:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 PART NO.
XB-X10-PCB-101

TITLE.
 PITCH 1.00 WAFER
 SMT TYPE

1 2 3 4 5 6 7 8 9

F





E

D

C

B

A

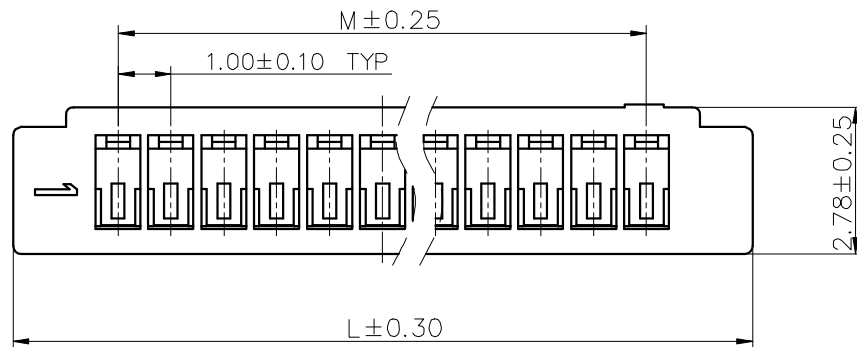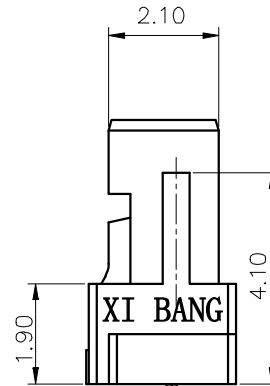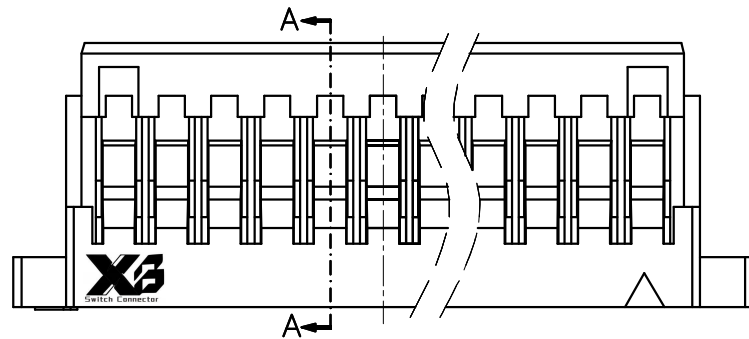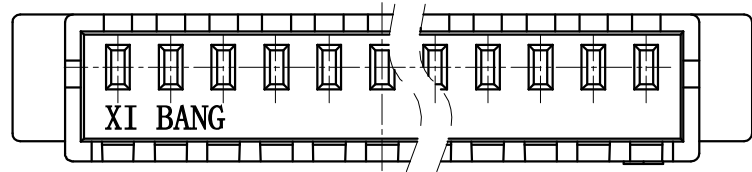

Specifications:
 Current rating: 1A AC/DC.
 Voltage rating: 50V AC/DC
 Temperature range: -40°C~+105°C.
 Contact resistance: 20mΩ Max.
 Insulation resistance: 100MΩ Min.
 Withstanding voltage: 500V AC/minute.
 Material: PA66.UL94V-0.

NO OF PINS/ROW	Dimensions	
	L	M
02	5.00	1.00
03	6.00	2.00
04	7.00	3.00
05	8.00	4.00
06	9.00	5.00
07	10.00	6.00
08	11.00	7.00
09	12.00	8.00
10	13.00	9.00
11	14.00	10.00
12	15.00	11.00
13	16.00	12.00
14	17.00	13.00
15	18.00	14.00
16	19.00	15.00

XB-X10-PCB-101M

XX A X

**No. of Pin/Row
02 ~ 16**

Material/Color


M=NYLON66/White

M1=NYLON66/Black

NF=NYLON66/Transparent

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
 PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 停 / X.?

.X 停 / .X?.30

.XX 停 / .XX?.20

.XXX 停 / .XXX?. 15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-X10-PCB-101M




PART NO.

XB-X10-PCB-101-M




TITLE:

1.00mm Pitch Housing

REV. A UNIT. mm SCALE. 1:1

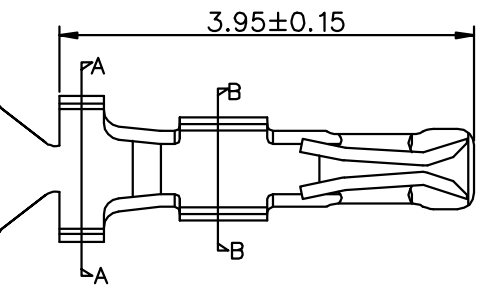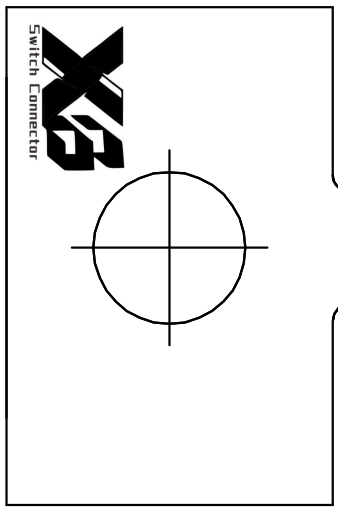

Specifications:
Terminal Material: Phosphor Bronze
Wire range: AWG#28-32
Insulation O. D: 0.80mm(Max)
Qty/Reel: 20000PCS

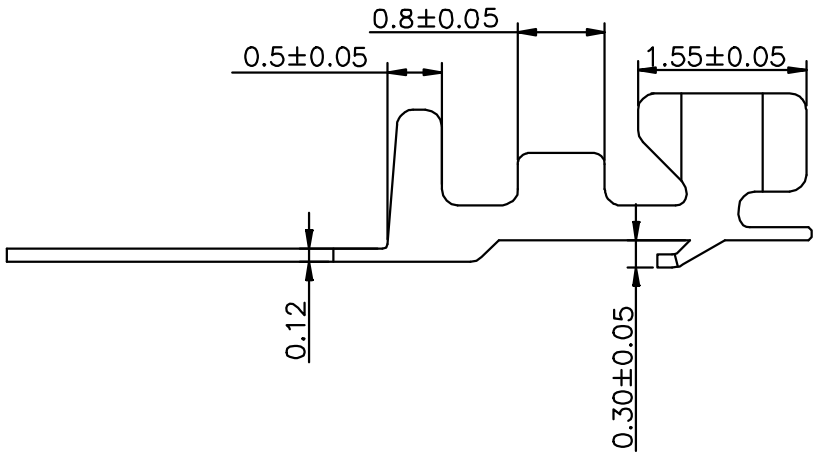

Ordering Information

XB-X10-PCB-101D XX

AB

Standard Plating
 01=Tin
 02=Gold flash

Materials
 AB=Phosphor Bronze

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
 PROJ.

GENERAL TOLERANCE	
X.位 /	X.?
.X位 /	.X?.25
.XX位 /	.XX?.20
.XXX位 /	.XXX?. 15

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	XB-X10-PCB-101D	TITLE.
PART NO.		
	XB-X10-PCB-101-DZ	1.0mm Pitch Terminal

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1