



Dim.D	NOTE
5.00mm	04~08pins
8.16mm	09~25pins

Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:
 Brass(Pin length less than 25mm)
 Phosphor Bronze(The total length of pin is more than 25mm)
 Insulator Material:
 PBT(Not resistant to high temperature),
 Nylon(High temperature resistance),
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet XI BANG
 hazardous substances control standards.

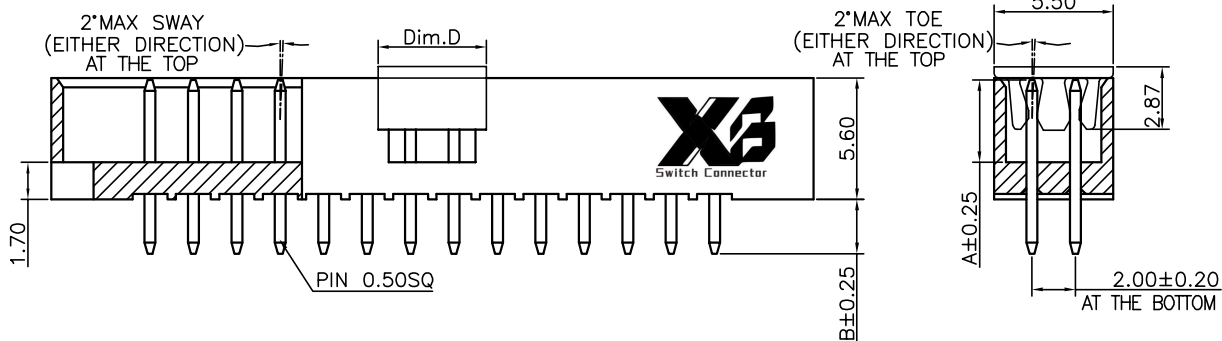


No.of PIN/ROW	Dimension Information		
	M	L1	L
04	6.00	14.00	15.10
05	8.00	16.00	17.10
06	10.00	18.00	19.10
07	12.00	20.00	21.10
08	14.00	22.00	23.10
09	16.00	24.00	25.10
10	18.00	26.00	27.10
11	20.00	28.00	29.10
12	22.00	30.00	31.10
13	24.00	32.00	33.10
14	26.00	34.00	35.10
15	28.00	36.00	37.10
16	30.00	38.00	39.10
17	32.00	40.00	41.10
18	34.00	42.00	43.10
19	36.00	44.00	45.10
20	38.00	46.00	47.10
21	40.00	48.00	49.10
22	42.00	50.00	51.10
23	44.00	52.00	53.10
24	46.00	54.00	55.10
25	48.00	56.00	57.10

Ordering Information

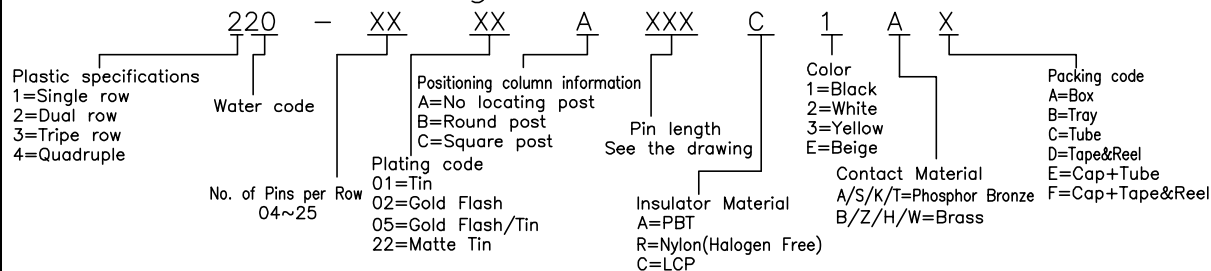

Recommended P.C.Board Layout (Tolerance:±0.05)



东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE: 2.00 BOX HEADER DUAL ROW DIP TYPE BASE 5.60H
	X.*±5.0°	X.±0.30	CHECKED:	DATE:	XB-JN-20-220	
	.X*±3.0°	.X±0.25	CO SIGNED:	DATE:	PART NO.	
	.XX*±2.0°	.XX±0.15	APPROVED:	DATE:		
REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1			