
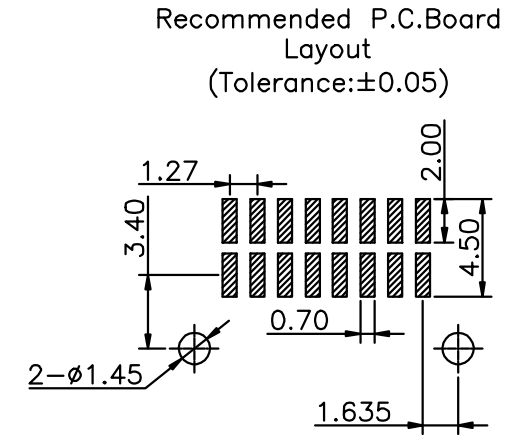


Specifications
 Current Rating:1.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet XI BANG hazardous substances control standards.

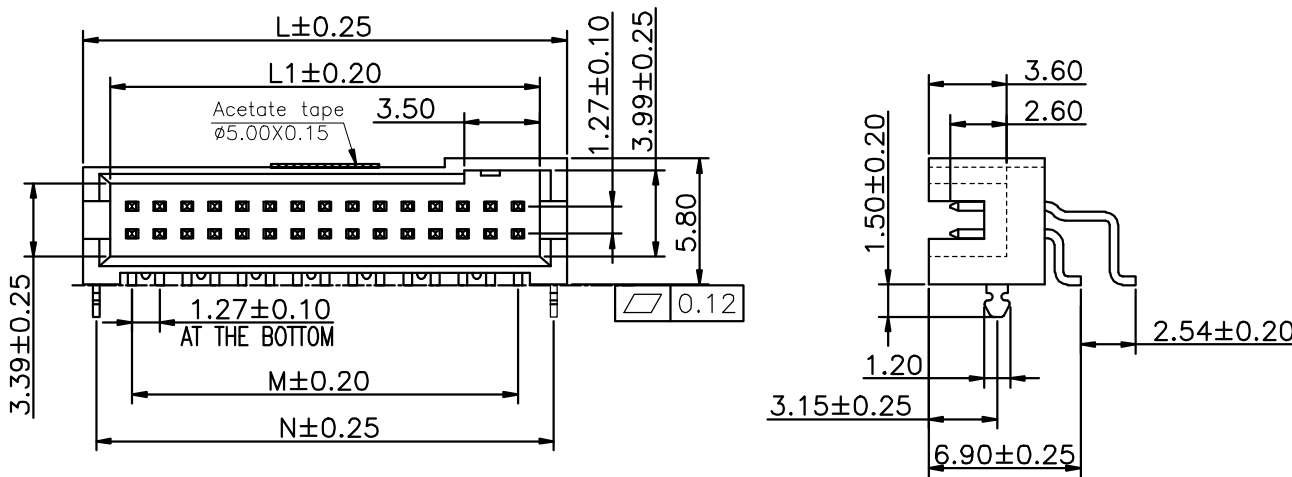

Ordering Information

252 - XX XX A XXX C 1 A X

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code

No. of Pins per Row
 05.08.10.15.
 20.22.24.30

Positioning column information
 A=No locating post
 B=Round post
 C=Square post
 F=Fork

Pin length
 See the drawing

Insulator Material
 R=Nylon(Halogen Free)
 C=LCP

Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze
 B/Z/H/W=Brass

Packing code
 A=Box
 C=Tube
 D=Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

No. of PIN/ROW	Dimension Information			
	M	N	L1	L
05	5.08	8.35	7.10	9.60
08	8.89	12.16	10.91	13.41
10	11.43	14.70	13.45	15.95
15	17.78	21.05	19.80	22.30
20	24.13	27.40	26.15	28.65
22	26.67	29.94	28.69	31.19
24	24.00	32.48	29.21	33.68
30	36.83	40.10	38.85	41.35

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-JN-127-C252	TITLE. 1.27 BOX HEADER DUAL ROWS SMT TYPE SIDE ENTRY
	X'±5.0'	X±0.30	CHECKED:	DATE:		
	.X'±3.0'	.X±0.25	CO SIGNED:	DATE:	PART NO.	
	.XX'±2.0'	.XX±0.15	APPROVED:	DATE:		
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1			