
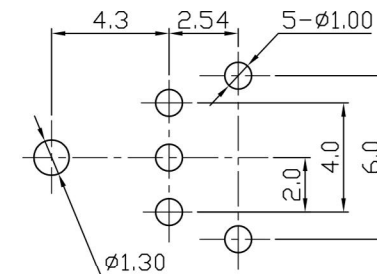
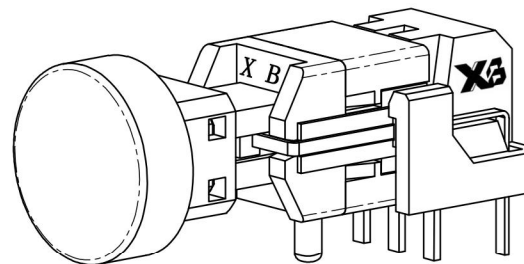
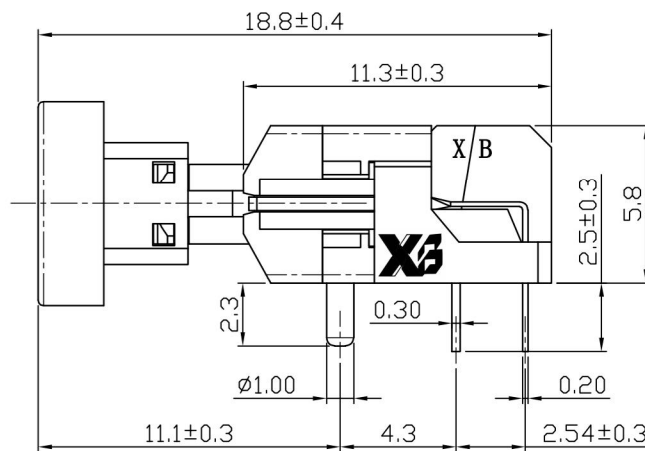


ROHS

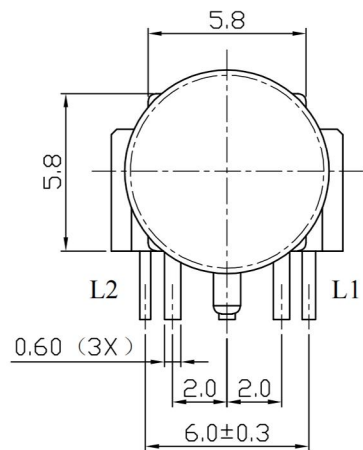


P.C.B LAYOUT
BOTTOM VIEW

SPECIFICATIONS


- (1) RATING: 0.1A 30V DC
- (2) CONTACT RESISTANCE: 100mΩmax
- (3) INSULATION RESISTANCE: 100MΩmin
- (4) DIELECTRIC STRENGTH: 250V AC FOR 1MIN
- (5) LIFE TEST: 10000cycles at a speed of 15-18cycles
- (6) LED OPERATING CURRENT: 20mA Max.
- (7) FUNCTION: 2P2T
- (8) OPERATING FORCE: 180gf±50gf
- (9) TRAVEL: 1.9±0.20mm
- (10) OPERATING TEMPERATURE: -16°C~+60°C

P/N explain:

- A: With Click/Self-Lock
□ B: Non-Click /Non-Lock
□ C: With Click/Non-Lock



SCHEMATIC (NON-SHORTING)

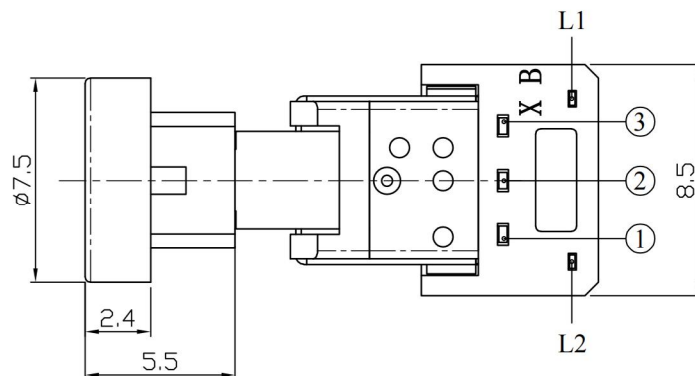

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

LED COLOR (X)											
1	2	3	4	5	6	23	13	12	52	...	...
Red	Yellow	Green	Blue	White	Pure green	Yellow Green	Red Green	Red Yellow	White Yellow	...	...

9	COVER	ABS	1	
8	LINING	PA66	1	
7	HOLDER	PA66	1	BLACK
6	LED	SEE LED SPEC.	1	
5	SPRING	SUS304	1	NATURAL
4	CAM STICK	SUS304	1	NATURAL
3	CASE	PPA/BRASS STRIP	1	GREY/ag PLATED
2	COVER	PA66	1	BLACK
1	KNOB	PA66/PBS STRIP	1	BLACK/ag CLAD
NO.	PARTS	MATERIALS	Q'TY	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB LED PUHS SWITCH

MODEL : XB-5858W-LED



TOLERANCE
≤1.5mm ±0.1
>1.5mm ±0.2
>10.0mm ±0.3



ANGLE TOL
±2°

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING