


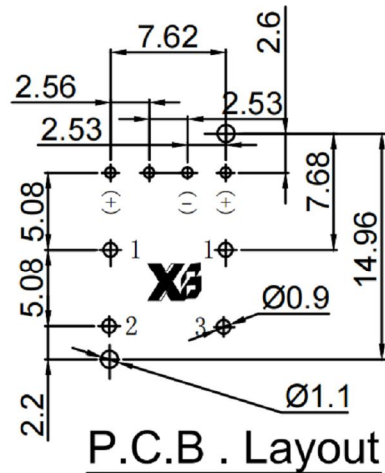




ROHS

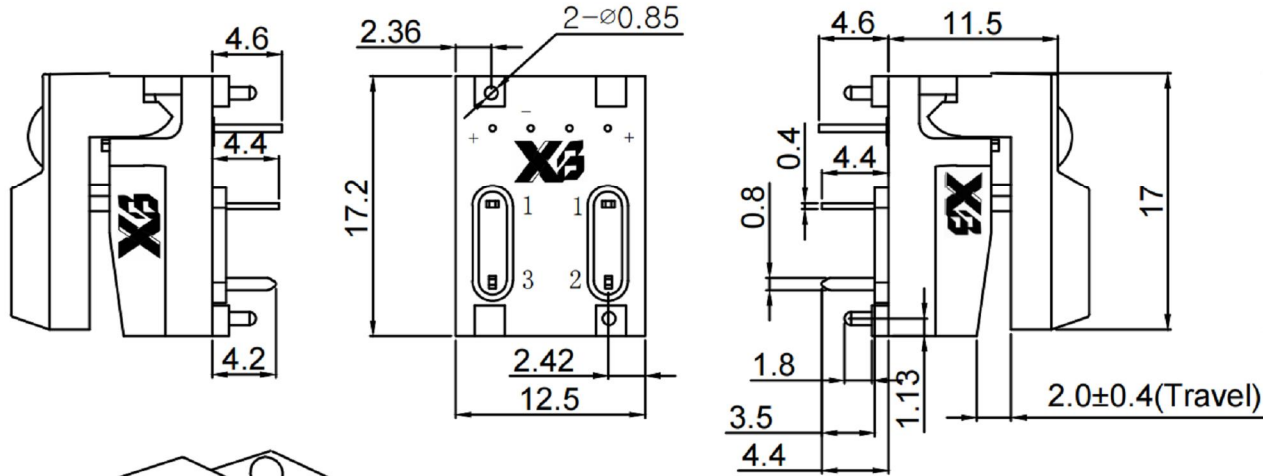

Specifications

- Circuit : SPDT
- Current rating : 12mA
- Voltage rating : 24VDC
- Dielectric withstanding voltage : 250VAC for 1 minute
- Contact resistance : 100m Ω Max. (Initial)
- Insulation resistance : 100M Ω Min.
- Operating force : 150 \pm 50gf
- Travel : 2.0mm \pm 0.4mm
- Operating life : 50,000 cycles Min.
- Solder specifications : 260 $^{\circ}$ C for 5 seconds
- Function : Momentary
- Operating temperature : +10 $^{\circ}$ C ~ +60 $^{\circ}$ C

MATERIAL

Base: Nylon66, UL rated: 94V-2 Min.;
 Cap: ABS;
 Terminal: Phosphor bronze, Golden plated.

O	Orange	橘色
F		
C	Carmine	洋红
P	Pansy	紫罗兰
Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
G	Green	绿色
R	Red	红色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

RG	灯发光颜色 Emitted color	最小	一般	最大	最大操作电流 (mA)	最大脉冲电流 (mA)	主波长 (nm)	峰值波 长(nm)
R	绿色	1.8	2.2	2.4	20	120	567	575
	红色	1.8	2.2	2.4	20	120	620	625
U	蓝色	2.8	3.2	3.5	20	120	460	470
G	黄绿色	1.8	2.2	2.4	20	120	567	575
O	橙色	1.8	2.2	2.4	20	120	600	610
R	红色	1.8	2.2	2.4	20	120	620	625
B	黑色							
A	灰色							



东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB TACT SWITCH

MODEL : XB-PB-86-A2



UNIT : MM	DWN.	DATE	TOLERANCE	ANGLE TOL
SCALE : 5 : 1	CHK'D	DATE	<=1.5mm \pm 0.1	\pm 2 $^{\circ}$
VERSION	APPD.	DATE	> 1.5mm \pm 0.2	
			>=10.0mm \pm 0.3	

8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING