ROHS

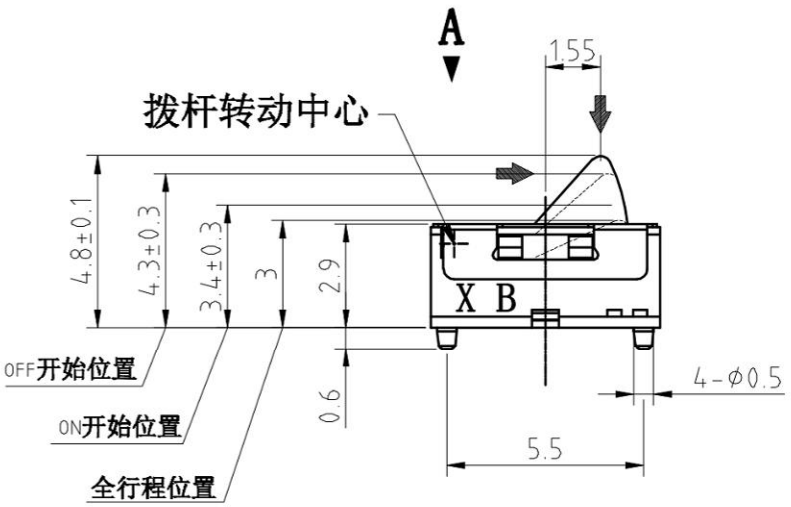





电路图：常闭式(N.C)
1个电路2个触点
端子排列（自A方向看）

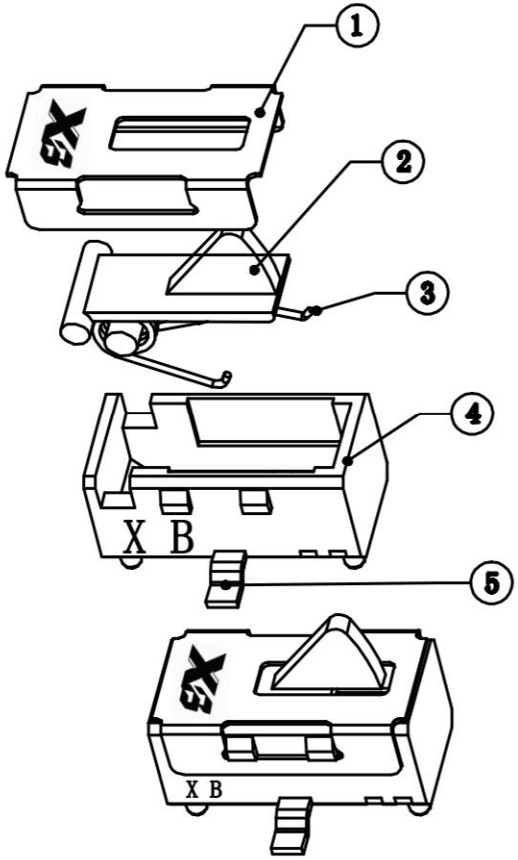

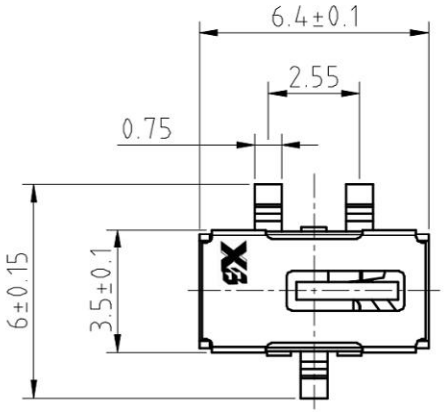

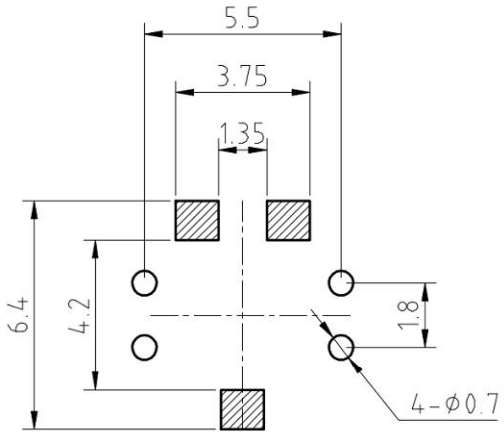

印制电路板及焊接安装孔参考图
（自A方向看）

SPECIFICATION (INITIAL)
RATING:
CONTACT RESISTANCE: MAX 30mΩ
INSULATION RESISTANCE: 500MΩ AT 500V DC
WITHSTAND VOLTAGE: AC 250V FOR 1 MIN
OPERATION FORCE: 30gf±10gf
SWITCHING LIFE:100000 Cycles(6-10c/m loading)

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

Switch Connector

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB DETECTION SWITCH

MODEL XB-TM-VT-07M-CB-S带柱（双触点常闭型）

UNIT : MM	DWN.	GAO. PENG	DATE	
SCALE : 5 : 1	CHK'D	PANG. DONG	DATE	
VERSION 01	APPD.	HE. LONG. FEI	DATE	

TOLERANCE	ANGLE TOL
<=1.5mm ±0.1	
> 1.5mm ±0.2	±2°
>=10.0mm ±0.3	

NO.	PART NAME	MATERIAL	QTY.	FINISHING
8	REEL	PS	1	BLUE
7	CARRIER	PS	1	CLEAR
6	COVER TAPE	PS	1	CLEAR
5	CONTACT	PBS STRIP	1	Ag CLAD
4	COVER	IRON STRIP	1	Ni PLATED
3	CASE	NYLON	1	BLACK
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	NYLON	1	BLACK