


NOTE:

- ELECTRICAL CHARACTERISTICS
 - VOLTAGE RATING: 30V DC
 - CURRENT RATING: 2.0A DC
 - CONTACT RESISTANCE: 50 milliohms MAX.
 - INSULATION RESISTANCE: 100 Megohms MIN.
 - DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR 1 MINUTE.
- OPERATING TEMPERATURE: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- RoHS 2002/95/EC COMPLIANT.

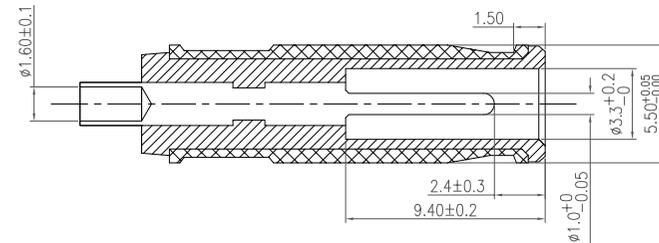

MATE PLUG
P/N.: DP550100-0085-60000H


NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	DC JACK 接地端子	1	C2680 H	Ag 50u" plated all over Nickel under plated .
C	DC JACK 端子1	1	C2680 H	Ag 20u" plated all over Nickel under plated .
B	弹片端子	1	C5210 H	Ag 50u" plated all over Nickel under plated .
A	HOUSING	1	PBT GF15%	BLACK BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


DECIMALS:		ANGLES:		DESIGN:	GAO.PENG	PART NAME: DC POWER JACK
DIM	TOL	DIM	TOL	CHECK:	2022.5.11	
X.	± 0.50	X.	$\pm 2^{\circ}$	APPROVED	HE.LONG.FEI	PART NO. XB-DC550110-1169-20000H
X.X	± 0.30	X.X	$\pm 1^{\circ}$		2022.5.11	
X.XX	± 0.20	X.XX	—			SHEET: 1/1 REV.: A1
X.XXX	± 0.10	X.XXX	—			DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8				
7				
6				
5				




UNIT:
mm


PACKING SKETCH:





1.PRODUCT

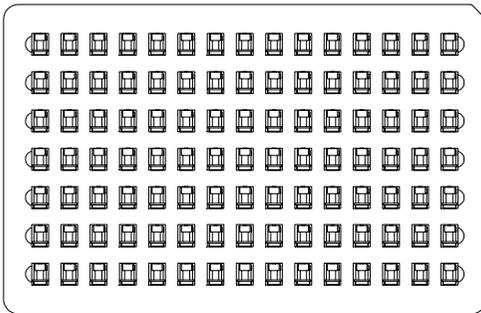

2.TRAY:
(330mm*210mm*20.5mm)



3.PACK:
(19 TRAY/STACK)

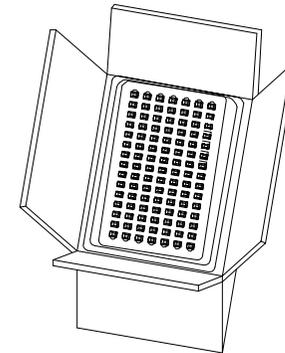

4.CARTON:
(350mm*223mm*345mm)

QTY/TRAY	TRAY/CARTON	QTY/CARTON
105	19	1995
Net weight/Box:	3.20Kg	
Gross weight/Box:	5.05Kg	

F
E
D
C
B

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	GAO.PENG	PART NAME:	
DIM	TOL	DIM	TOL		2022.5.11	DC POWER JACK-包装图	
X.	±0.50	X.	±2°	CHECK:		PART NO.	
X.X	±0.30	X.X	±1°			XB-DC550100-1169-20000H	
X.XX	±0.20	X.XX	—	APPROVED	HE.LONG.FEI	SHEET: 1/1	REV.: A1
X.XXX	±0.10	X.XXX	—		2022.5.11	DRAWING NO	
3RD ANGLE PROJECTION				UNIT:			
				mm			

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
8	7	6	5	4

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1