


# 开关外形尺寸:

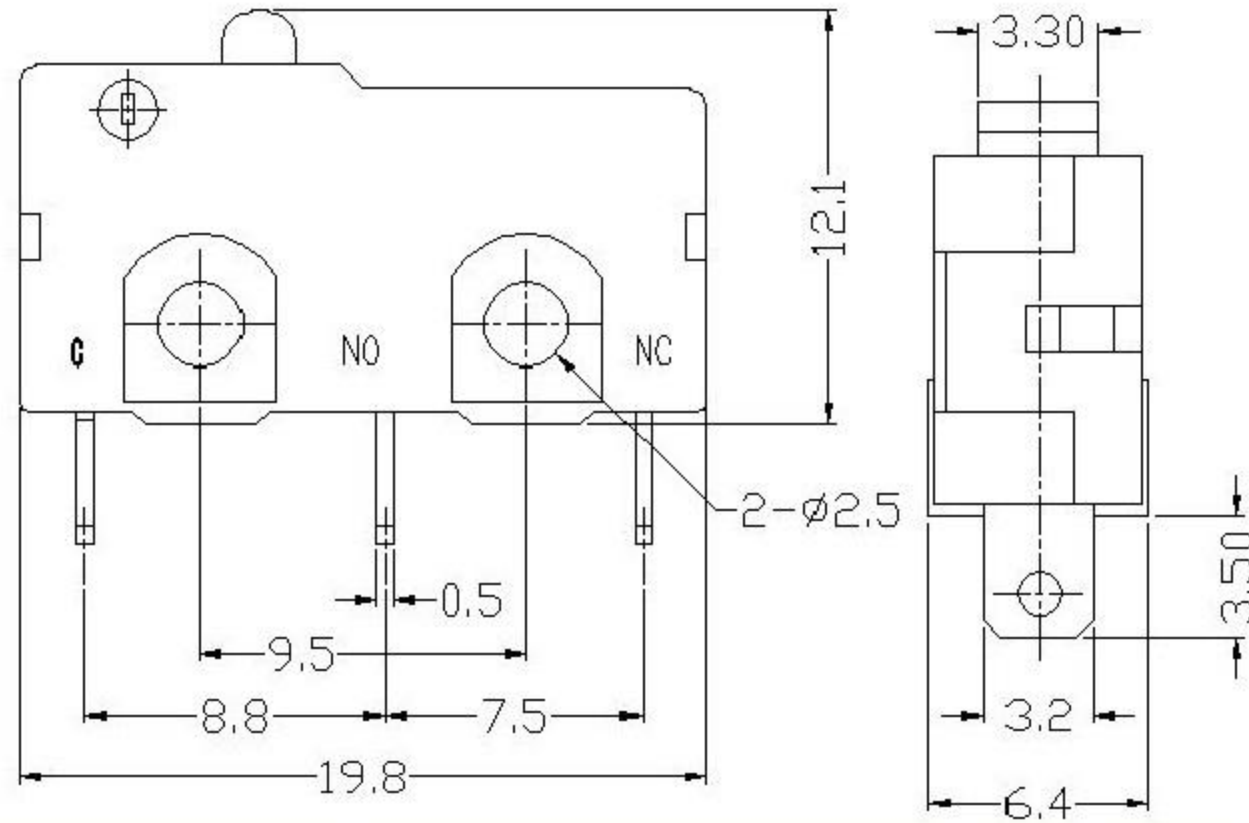

## 开关技术特性(Switch technical Characteristics):

项目 (ITEM)	技术参数 (technical parameter)	特性值 (Value)
1	电气额定值 (Electrical Rating)	10 (1.5) A / 16 (3) A / 10 (3) A 250VAC
2	接触电阻 (Contact Resistance)	≤ 50mΩ (初始值 Initial value)
3	绝缘电阻 (Insulation Resistance)	≥ 100MΩ (500VDC)
4	耐压强度 (Dielectric Voltage)	同极不相接端子间 (between non-connected terminals)
		端子与外壳或非载流金属零件之间 (between terminals and the metal frame)
		1500V/0.5mA/60S
		3000V/0.5mA/60S
5	电气寿命 (Electrical Life)	≥ 10000 cycles
6	机械寿命 (Mechanical Life)	≥ 100000 cycles
7	工作温度 (Operating Temperature)	0~125℃
8	操作频率 (Operating Frequency)	电气 (electrical) : 15 cycles
		机械 (Mechanical) : 60 cycles
9	抗振动 (Vibration Proof)	振动频率 (Vibration Frequency) : 10~55Hz;
		振幅 (Amplitude) : 1.5mm;
		三向 (Three directions) : 1H
10	可焊性 (Solder Ability): 超过 80% 的浸锡面积被焊料所覆盖 (More than 80% of immersed part shall be covered with solder)	焊接温度 (Soldering Temperature) : 235±5℃
		浸渍时间 (Immersing Time) : 2~3S
11	耐焊接热 (Solder Heat Resistance)	自动焊接 (Dip Soldering) : 260±5℃ 5±1S
		手工焊接 (Manual Soldering) : 300±5℃ 2~3S
12	安全认证 (Safety Approvals)	UL、CSA、VDE、ENEC、TUV、CE、CQC
13	测试条件 (Test Conditions)	环境温度 (Ambient Temperature) : 20±5℃
		相对湿度 (Relative Humidity) : 65±5%RH
		大气压 (Air Pressure) : 86~106KPa

(The defining characteristics of operation)	(Operating Parameter)	(Abbreviation)	(Units)	(Value)
	自由位置 (Free Position)	FP	mm	12.1±0.2
	动作位置 (Operating Position)	OP	mm	11.5±0.5
	复位位置 (Releasing Position)	RP	mm	11.7±0.5
	总行程位置 (Total travel Position)	TTP	mm	10.7
	动作力 (Operating Force)	OF	N	1.0~3.5
	回复力 (Releasing Force)	RF	N	—
	总行程力 (Total travel Force)	TTF	N	—
	预行程 (Pre Travel)	PT	mm	0.3~1.0
	过行程 (Over Travel)	OT	mm	0.2 (Min)
	差动行程 (Movement Differential)	MD	mm	0.4 (Max)

NO.	PARTS	MATERIALS	Q'TY	TOLERANCE UNLESS SPECIFIED				初版	
8				WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初版		
7				OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		
5	SPRING	SUS	1	NATURAL			APPD.		
4	CAM STICK	SUS	1	NATURAL	TITLE : Micro Switch		UNIT : mm	DRWG NO.:	
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	MODEL:		SCALE: 5:1	DWN.	
2	COVER	PA66	1	BLACK				2012-8-13	
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD			CHK'D	2012-8-13	
				<b>东莞市溪榜电子有限公司</b>				APPD.	