
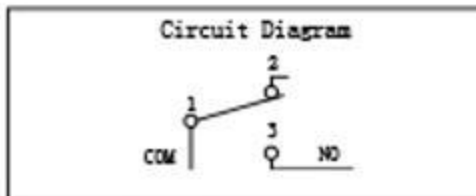
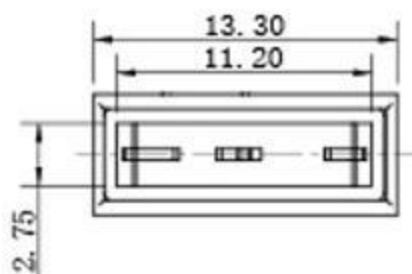
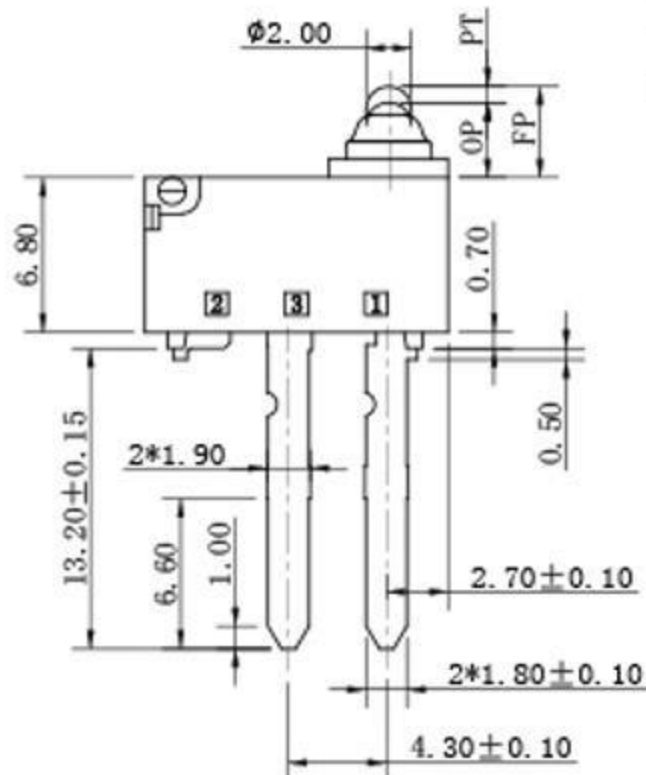


REV	MARK	DESCRIPTION	DRAFTED BY	DATE

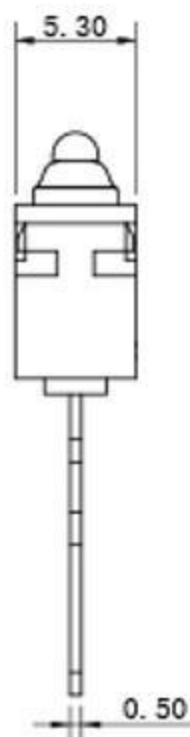

CHARACTERISTICS	
OPERATING FORCE (OF):	130gf Max.
RELEASE FORCE (RF):	30gf Min.
OPERATING POSITION:	3.40±0.30 mm.
PRE TRAVEL:	1.30mm Max.
DIFFERENTIAL TRAVEL:	0.25mm Max.
OVER TRAVEL:	0.6mm Min.

ELECTRICAL DATA	
RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES

MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP.	-40℃~+85℃
WATERPROOF	IP67

OUTLINE DRAWING		TOLERANCE UNLESS OTHERWISE SPECIFIED								
TITLE	H3 SERIES MICRO SWITCH	<3	1~3	3~10	10~30	30~100	100~200	ANGLE		
MODEL	H3-D1	±0.2	±0.3	±0.4	±0.6	±1.0	±1.5	±3.0°		
PART NO.										
DRAFTED BY	LV ZHIPENG								DATE	2020-7-21
CHECKED BY	YANG HONGTAO									
APPROVED BY	TANG XIAOBO									
		SCALE			UNIT	mm				
		VERSION	REV		A1					

东莞市溪榜电子有限公司